

**SANDBLASTING CABINET - M SUCTION SERIES**

120 V / 208-230 V / 240 V / 460 V / 575 V



- Warranty
- Safety
- Operation

- Service Parts
- Accessory Information
- Registration Form

**INSTRUCTION MANUAL**

## TABLE OF CONTENTS

	<b>Page</b>
NOTICE TO PURCHASERS.....	3
SAFETY AND WARNING.....	3
DANGER AND WARNING LABELS .....	4
PERSONAL SAFETY - UNIT USE AND CARE - GENERAL SAFETY RULES.....	5
INTRODUCTION - INSTALLATION - PNEUMATIC CONNECTION .....	6
ELECTRICAL CONNECTIONS.....	7
PROPER AIRJET/NOZZLE COMBINATIONS - VERIFY INSTALLATION.....	8
LOADING ABRASIVE MEDIA.....	9
SHUT DOWN CHANGING THE MEDIA.....	10
OPERATION .....	11
RECLAIMER.....	12
MAINTENANCE CABINET AND DUST COLLECTOR.....	13, 14
DCT1000 TIMER CONTROLLER (ADJUSTMENTS) .....	15 to 17
NOZZLE AND JET MAINTENANCE .....	18
TROUBLESHOOTING.....	19 to 23
SCHEMATIC OF UNIT .....	24
AIR SUCTION MANIFOLD - STANDARD ½" PIPING.....	25
RECYCLING SYSTEM.....	26
BAGHOUSE DUST COLLECTOR .....	27
CARTRIDGE DUST COLLECTOR .....	28
FAN MOTOR & SUCTION HOSE.....	29
G5 BLAST GUN .....	30
STANDARD & NO-CONTACT OPTIONAL FOOT PEDAL .....	31
RECOMMENDED SPARE PARTS .....	32
PNEUMATIC DIAGRAM.....	33
ELECTRICAL SCHEMATICS .....	34 to 42
IST LIMITED WARRANTY .....	43
IST WARRANTY REGISTRATION .....	44

## **NOTICE TO PURCHASERS AND USERS OF OUR PRODUCTS AND THIS INFORMATIONAL MATERIAL**

The products described in this material, and the information relating to those products, is intended for knowledgeable, experienced users of abrasive blasting equipment.

No representation is intended or made as to the suitability of the products described herein for any particular purpose of application. No representations are intended or made as to the efficiency, production rate, or the useful life of the products described herein. Any estimate regarding production rates or production finishes are the responsibility of the user and must be derived solely from the user's experience and expertise, and must not be based on information in this material.

The products described in this material may be combined by the user in a variety of ways for purposes determined solely by the user. No representations are intended or made as to the suitability or engineering balance of the combination of products determined by the user in his selection, nor as to the compliance with regulations or standard practice of such combinations of components or products.

It is the responsibility of the knowledgeable, experienced users of the products mentioned in this material to familiarize themselves with the appropriate laws, regulations and safe practices that apply to these products, equipment that is connected to these products and materials that may be used with these products.

It is the responsibility of the user to insure that proper training of operators has been performed and a safe work environment is provided.

Our company is proud to provide a variety of products to the abrasive blasting industry, and we have confidence that the professionals in our industry will utilize their knowledge and expertise in the safe efficient use of these products.


### **SAFETY AND WARNING**

#### **GENERAL SAFETY**

1. Carefully inspect the shipping carton for any signs of transport damage. The damage to the carton often indicates possibility of transport damage to the equipment inside.
2. Carefully remove your IST SANDBLASTING CABINET from the shipping carton and skid.
3. Check your equipment immediately to ensure that it is free of transport damage. Report any transport damage to the carrier without delay for possible claim procedures. International Surface Technologies inc. is not responsible for damage to equipment after it leaves our warehouse.
4. Check the equipment and compare it with the parts you have received. If any parts are missing, contact the supplier you purchased the equipment from.

Before operating the IST SANDBLASTING CABINET, read this Instruction Manual completely. All IST products are engineered and manufactured to the highest performance standards and have been subjected to detail testing before shipment from the factory.

## DANGER AND WARNING LABELS

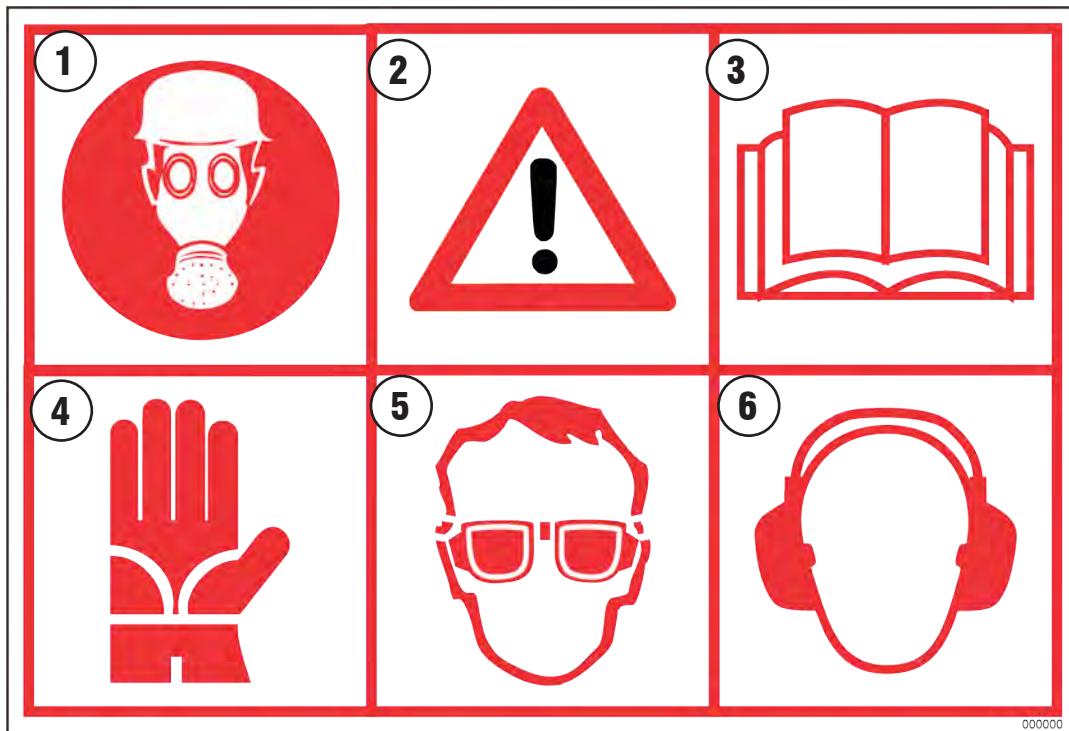

1. Wear breathing mask
2. Observe warnings at all times
3. Read the Instruction Manual carefully
4. Wear rubber gloves.
5. Wear protective eyewear before use
6. Wear earing protection before use

### **WARNING**

« READ ALL INSTRUCTIONS » Failure to follow the SAFETY RULES identified by a BULLET (●) symbol listed BELOW and other safety precautions may result in serious personal injury.

« SAVE THESE INSTRUCTIONS »

## GENERAL SAFETY RULES

- **KEEP WORK AREA CLEAN.**
- **KEEP CHILDREN AWAY.** Do not let visitors come in contact with the equipment. All visitors should be kept away from the work area.

## PERSONAL SAFETY

### **WARNING**

SANDBLAST CABINET MAY EMIT POTENTIALLY HAZARD DUST AND AIRBORNE CONTAMINANTS DURING OPERATION. YOU MUST WEAR APPROPRIATE BREATHING PROTECTION AT ALL TIMES WHILE OPERATING OR STANDING AROUND THE UNIT.

- **GUARD AGAINST ELECTRIC SHOCK.** Non-skid footwear is recommended where damp or wet ground may be encountered. A ground fault circuit interrupter protected power line must be used for these conditions.
- **DRESS PROPERLY.** Do not wear loose clothing or jewelry. They can be caught in the moving parts. Wear protective hair covering to contain long hair.
- **USE SAFETY EQUIPMENT. WEAR SAFETY GOGGLES** or glasses with side shields.
- **WEAR A DUST PROOF MASK.**
- **STAY ALERT. USE YOUR COMMON SENSE.** Concentrate on what you are doing. Do not operate the unit when you are tired or under the influence of drugs.
- **DO NOT OVERREACH.** Keep proper footing and balance at all times.
- **BEFORE CONNECTING THE UNIT** be sure the power is the same as that specified on the nameplate of the Sand Blasting Cabinet. With power greater than that specified on the nameplate can seriously injure the user – as well as damage the Unit.
- **BEFORE STARTING TO WORK** you must wear earing protections, efficient for 80 dB or more.

## UNIT USE AND CARE

- **DO NOT FORCE THE UNIT.** It will perform better and safer at the rate for which it was designed.
- **THE USE OF ANY OTHER ACCESSORIES** not specified in this manual may create a hazard.
- **CLOSE THE MAIN BREAKER SWITCH BEFORE SERVICING** or when not in use.
- **DO NOT ALTER OR MISUSE THE UNIT.** These units are precision built. Any alteration or modification not specified is misuse and may result in a dangerous situation.

Only trained repairmen should attempt (●) **ALL REPAIRS**, electrical or mechanical. Contact the nearest IST a repair service facility. Use only IST replacement parts; any other parts may create a hazard.

## ENVIRONMENTAL CONDITIONS FOR WHICH THE EQUIPMENT IS DESIGNED

- Indoor location
- Altitude 6,562 ft max
- Ambient temperature: 104 °F (40 °C) max
- Relative humidity: 80 %
- Main supply voltage fluctuation +/- 10 %
- To use with noncombustible dust only

## INTRODUCTION


Welcome to the IST<sup>®</sup> family of sandblasting products. This booklet contains helpful information and acquaints you with the operation and maintenance of your equipment. Please read carefully and follow our recommendations to assure trouble free operation. If you have any questions, please do not hesitate to contact your distributor or our technical service.

## INSTALLATION

1. Unbolt the blast cabinet from the pallet. Attach a strap or a hoist to the eyelets located on the top of the machine and move it to its final location using a lift truck or a crane.
2. Make sure the cabinet is leveled and well grounded. Do not place on a wooden floor or a rubber mat, unless a ground wire has been installed. Check with a qualified electrician.
3. Place the system to the installation location.
4. Unwrap and remove the cabinet from the pallet.
5. Ensure there is adequate space on both sides of the cabinet for full opening of part loading/unloading and maintenance access doors.
6. Ensure there is sufficient space on both sides of the system for easy access to components such as the reclaimer and dust collector.
7. The dust collector should be located on a leveled area near the back of the cabinet, on the right side (while facing cabinet). Attach one end of the corrugated discharge hose to the outlet of the reclaimer and the other end to the inlet located at the bottom of the dust collector. Secure both ends with the supplied clamps. See dust collector section for more details.

All IST M series cabinets are equipped with a motorized dust collector ranging de 400 cfm.

## PNEUMATIC CONNECTION

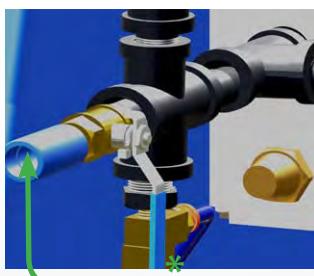

Connect your shop's air supply line to the air inlet. The hose should have a minimum of 1/2 inch inside diameter. Never use male-female quick couplings. Choose couplings that offer as little restriction to the airflow as possible.

To properly operate, your IST system use clean, dry air. Moisture or oil from the compressed air supply can contaminate the abrasive, and prevent it from flowing freely and cause inefficient blasting.



For detailed pneumatic connections, refer to pneumatic diagram page 33

**CAUTION** If you use interlocking connections, secure them with pins. A connection that disconnects under pressure, could cause serious injury.

1/2" min. diameter

## ELECTRICAL CONNECTIONS

Connect cabinet power supply cord to standard 120 V outlet.

*Note: Non standard voltage is also available.*

All electrical connections to the IST cabinet should be made by a qualified electrician and must comply to the codes, standards, and procedures specified by the local authority having jurisdiction.



The customer is responsible for providing appropriate disconnecting means adjacent to the equipment for each incoming power circuit.

For detailed electrical connections wiring requirements, overload and starter, Refer to electrical drawings on pages 34 to 42.




It is important to connect the IST system to an Earth Ground to bleed off static electricity, which may be generated while blasting. The Earth Ground may also reduce the discomfort an operator may experience when static electricity is discharged.


### CONNECTIONS TO CABINET AND DUST COLLECTOR

	Dust Collector Model				
	DCM100	DCM600	DCM160/900	DCM230/1200	DCM330/1800
Fan Motor (hp)	1/2	1	Available from 2 to 10 hp		
Fan Motor (cfm)	400	600	900	1200	1800
Power Requirement	120 V /15 A	120 V /20 A	Available in 208-230V, 240 V, 460 V, and 575 V		

#### DCM Motor 120 V

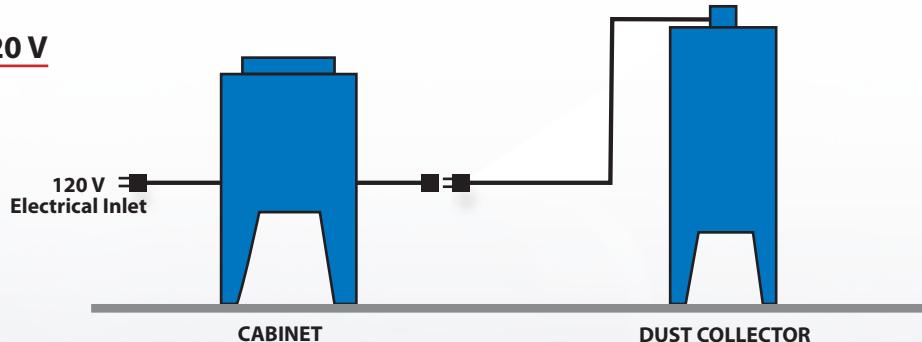

#### DCM Motor 208-230 V, 240 V, 460 V, and 575 V

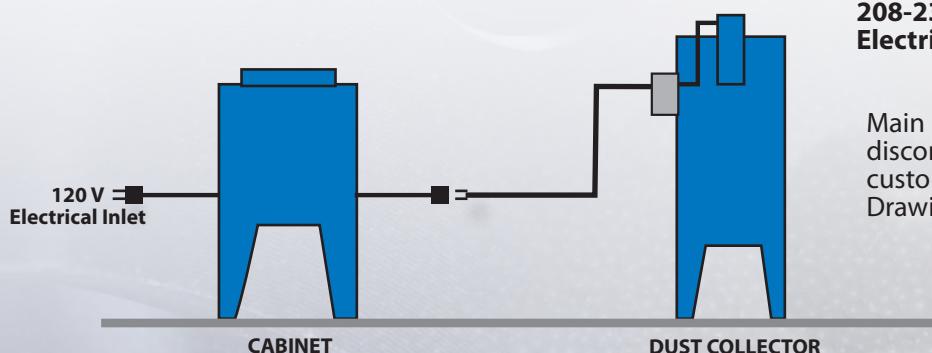

**208-230 V, 240 V, 460 V and 575V Electrical Inlet**

Main entry with fuse disconnect switch supplied by customer. Refer to Electrical Drawings on pages 34 to 42.

## PROPER AIRJET/NOZZLE COMBINATIONS

Make sure you have a proper air jet/nozzle combination. Standard IST suction cabinets are equipped with 5/32" air jets and 5/16" nozzles.

A simple way to determine if you have an incorrect combination is to check the abrasive regulator at the bottom of the reclaimer when the operator's pedal is depressed. If media is being discharged out of the regulator, there is an incorrect jet/nozzle combination or an obstruction inside the gun.

## AIR CONSUMPTION TABLE

Orifice	Nozzle <sup>3</sup>	PRESSURE (psi <sup>1</sup> )						<---- psi cfm <sup>2</sup>
		40	50	60	70	80	100 <sup>2</sup>	
1/8"	1/4"	12	15	17	19	21	26	
5/32"	5/16"	19	23	27	30	34	42	
3/16"	3/8"	27	33	38	43	48	58	
7/32"	7/16"	38	46	52	60	65	80	
1/4"	1/2"	49	58	67	76	85	94	

<sup>0</sup>Optimal Pressure / <sup>1</sup>psi: Pressure at nozzle in lb/po<sup>2</sup> / <sup>2</sup>cfm: cubic feet per minute / Nozzle <sup>3</sup>I.D.: inside nozzle diameter.

## VERIFY INSTALLATION

1. Check that all pipe and hose connections are tightly fastened and air tight.
2. Check that all electrical box covers are securely installed.
3. Check that the dust drum under the dust collector is sitting firmly and is center (if equipped).
4. Turn the cabinet power switch to the "ON" position. The cabinet lights will power on and the dust collector fan and the reclaimer will start.
5. Set the blast air pressure regulator to the desired pressure.
6. Insert both hands into the cabinet gloves, take the gun and press the foot pedal. Blasting will start, wait a few second and the blast flow will stabilize.
7. Turn the cabinet power switch to the "OFF" position. Light will turn off and the dust collector fan and reclaimer will stop.

**CAUTION** Disable and lock out power sources before performing service or maintenance work. Do not look into the fan outlet to determine the correct motor rotation. Check that the fan exhaust is clear of tools and free of debris before checking fan rotation. To avoid personal injury, stay clear of the fan exhaust.

## LOADING ABRASIVE MEDIA

### WARNING

Your suction cabinet is designed to operate efficiently with most **recyclable abrasive media** on the market. However, certain types such as sand, recycled glass or silica are not recommended and should not be used in our blast cabinet.

These abrasives generate very fine dust that may block the bag's pores, obstruct the ventilation system and cause dust accumulation inside the cabinet while in use. Instead, use recyclable abrasives such as glass beads, aluminum oxide, steel grit or plastic media.

**For better reclaiming results, please call one of our technical representatives** if you use a different **type of abrasive** from the one your equipment has been set for at the factory.

## Manufactured Abrasives

NAME	TYPE	SHAPE	HARDNESS SCALE	DENSITY PDS/CUFT	CONTENT SILICA	DUST FACTOR	MESH SIZE	REUSE FACTOR	AVAILABILITY
Aluminium Oxide	Oxide	Irregular	8 Mohs	120	None	Low	6-600	Good	Good
Silicon Carbide	Carbide	Angular	9 Mohs	100-110	None	Low	6-600	Good	Good
Glass Beads	Silica	Spherical	5-6 Mohs	100	0 free Silica	Low	20-325	Good	Good
Plastic Grit	Polyurethane	Angular	3-4 Mohs	58-60	None	Low	12-80	Good	Good
Chilled Iron & Steel Grit	Metallic	Angular	40-68 Rc Rockwell C	250	None	Very Low	18-200	High	Good
Chilled Iron & Steel Shot	Metallic	Spherical	40-68 Rc Rockwell C	250	None	Very Low	7-200	High	Good

## LOADING ABRASIVE MEDIA

**Follow these steps to avoid locking the drain at the bottom of the cabinet when adding a brasic media.**



1. Turn on the cabinet to activate the vacuum system.

2. **SLOWLY add approximately half a bag of abrasive media through the grating inside the cabinet.**

*NOTE: Some cabinets can hold more than half a bag when added gradually.*

## **SHUT DOWN**

1. Release the foot treadle. The blast will stop.
2. Once cleaning is finished, await 10 to 15 seconds before turning off the power switch and opening the door of the cabinet in order to allow the evacuation of dust in suspension.
3. Open the door and remove the treated parts from the blast cabinet.
4. Close air supply.
5. Turn power switch to the "OFF" position.
6. Empty the dust collector waste drum (Optional part). Replace the drum squarely on the dust drum platform and centered under the cover. The dust drum and cover must create an airtight seal.
7. Shake bags of your dust collector (disregard if you system is equipped with optional automatic bag shaker or a cartridge-type dust collector).

## **CHANGING THE MEDIA**

When changing from one type or size of media to another, it can be extremely important to clean out the blast and recovery hoses, storage hopper, and the cabinet interior thoroughly to avoid contamination of the new media.

**During normal sandblasting operation, the media should be replaced completely every 8 hours.**

## **CLEANING THE SYSTEM**

1. Turn the system off.
2. You need a container large enough to collect used media. Place the container under the AR ¾ valve (part 10, page 24).
3. Remove AR ¾ rubber plug (part 5, page 24), media will fall in your container.
4. Turn on system and press foot pedal, to make sure all media has been removed from the blast hose and nozzle.
5. Turn off system and put back AR ¾ rubber plug (part 5, page 24).
6. When cleaning is done put back everything in place.

## **RELOADING WITH NEW ABRASIVE MEDIA**

Refer to Abrasive Loading procedure on page 9


## OPERATION

Turn on compressed air and turn on lightning and motor with the power switch. Compressed air must be clean, dry, and oil free.




1. When using the unit, air pressure **should not exceed 110 psi**. Place the part to be treated inside the cabinet. The parts must be free of oil, grease, and moisture. Close and latch the cabinet load doors.
2. After closing the door, insert your hands into the two front glove openings. The blasting gun should be held firmly in one hand and the part to be treated in the other hand. The stream of abrasive should be oriented to the bottom of the working space.
3. Depressing blast control pedal will release compressed air flow to the blast gun. As the compressed air passes through the air jet, it creates a vacuum inside the gun and sucks up the media from the reclaimer and propels it out through the nozzle. Hold the gun or nozzle at a 90° angle to the part at a distance that produces the fastest results. The reclaimer screen will require periodic cleaning. The frequency of cleaning will depend on the volume of debris produced. See maintenance section at page 13 for more information.
4. After the media has blasted the part, the reclaiming system vacuums up the abrasive, dust, and foreign material through the conduit at the bottom of the cabinet to the reclaimer. The reusable abrasive is separated from the dust and foreign material and is returned to the storage hopper for reuse. The dust bag or the cartridges of the dust collector, filters the dust and fine particles. Larger pieces of contaminants are trapped in the hopper's screen drawer.

## HOW IT WORKS

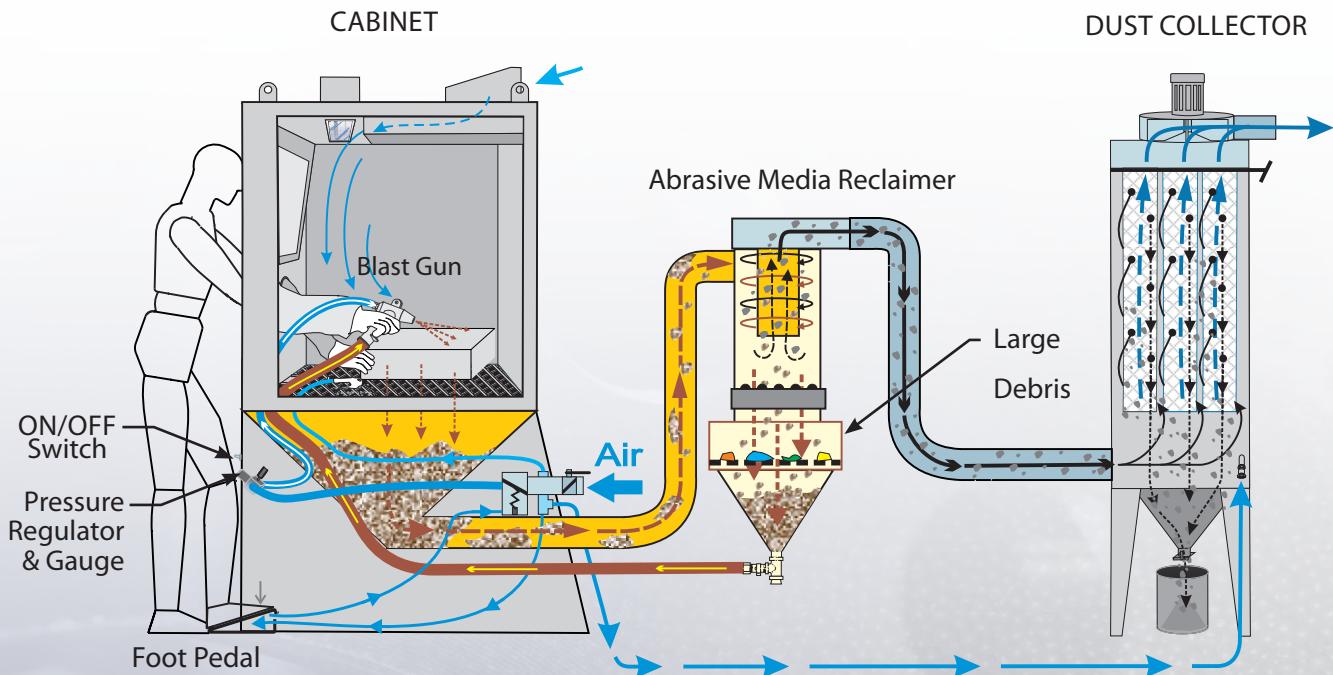


## RECLAIMER

Although the reclaimer is factory set, it is possible to increase the amount of fine dust to be sucked up by the dust bag or dust collector. Just move the rubber band to adjust the obstruction of the holes located behind it. There are **two methods to change those settings.**

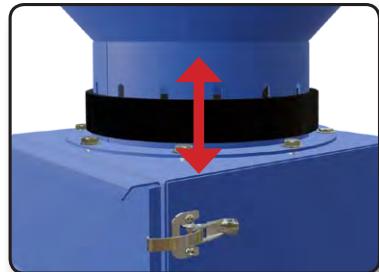

### **1. Adjustment of the SBR 1/8" x 2" rubber band**

This adjustment will influence the quantity of dust that will be evacuated to the dust collector. Proceed step by step, moving the rubber band 1/4" at the time, covering or uncovering the slots behind it. **A wider opening will draw up more dust to the dust collector; a smaller opening will reduce that quantity. The equipment has to run for approx. two (2) hours before any changes can be noticed.** Repeat as needed.

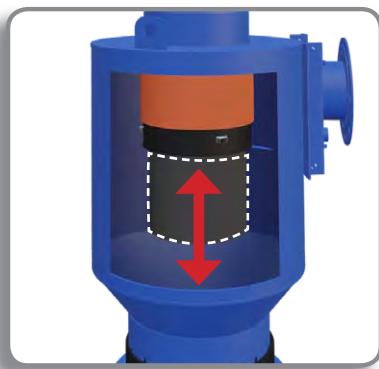

### **2. Adjustment of the telescopic tube, inside of reclaimer**

If, after a few tests, the rubber band adjustments should prove to be insufficient, you will have to proceed to the telescopic tube adjustment. This will be necessary if you have to change the abrasive type or granulometry. Proceed step by step, moving the tube up or down, 1 inch at the time. The equipment has to run for approx. two (2) hours before any changes can be noticed. Repeat as needed. Moving the tube downward will increase the quantity of dust drawn up by the dust collector, moving it up will decrease that quantity.

## AR 3/4 ABRASIVE REGULATOR





Located at the bottom of the reclaimer, the AR 3/4 abrasive regulator meters the amount of media discharged from the nozzle. Be sure that nothing seals off the hole completely. You can adjust the opening using the adjustable clamp that must be located over it, covering about 2/3 of the hole. A smaller opening will bring more abrasive to the nozzle; a wider opening will bring less abrasive. A complete opening or a complete covering will interrupt the abrasive flow. To insure the performances of your equipment, the compressed air supply must be clean and dry. Oil or humidity in the compressed air will cause an abrasive jam at the abrasive regulator level, reducing and even stopping the abrasive flow.

## MAINTENANCE CABINET AND DUST COLLECTOR



### DAILY MAINTENANCE & OPERATION

1. Check both the quantity and quality of abrasive frequently. If required, clean out the system and reload with new media.
2. To avoid blockage, empty and clean the reclaimer's screen drawer regularly.
3. Check for wear on all parts in direct contact with the blasting action: nozzle, gloves, window, plastic shield, air-jet, gun etc. Special attention must be given to nozzle, nozzle ring and rubber protector to avoid premature wear of gun. Make sure ventilation inlet is always free of obstruction.
4. Empty dust barrel or dust collector's bottom hopper regularly.
5. **Baghouse Dust Collector:** after each use, turn off the impeller and shake bags inside the dust collector. Never shake bags while the cabinet is running. Never wash bags, instead use compressed air, ***blowing from the outside to the inside of the bag***, (the opposite would clog the bag's pores and make it unusable).
6. **Cartridge Dust Collector:** verify the values on the DCT1000 and replace cartridges when indicated. See next page for details.

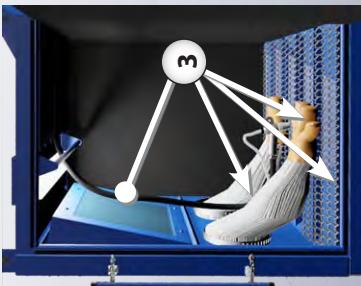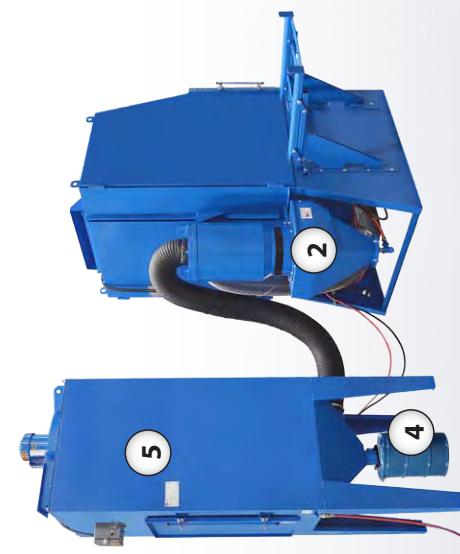

### WEEKLY

- **Sandblast Nozzle:** check the I.D. using a drill bit that is 1/8" wider than the original diameter of the nozzle. If the drill bit fits in, replace the nozzle. A worn nozzle will cause a drop of abrasive pull and velocity.
- **Abrasive Hose:** check abrasive hose for wear. It has to be changed before it gets any perforation. Give a special attention to parts of the hose that are curved.
- **Couplings and Gaskets:** check on a regular basis the hose couplings and gaskets for wear.
- **Media filters:** replace bags when the dust collector is unable to evacuate the dust cloud from the cabinet.

## MAINTENANCE OF CABINET & MEDIA RECLAIMER



### DAILY

1. Auditory inspection around the recycling system to identify air leaks

### MONTHLY

1. Disassembly and inspection of the AR7 abrasive regulator

RECYCLING SYSTEM

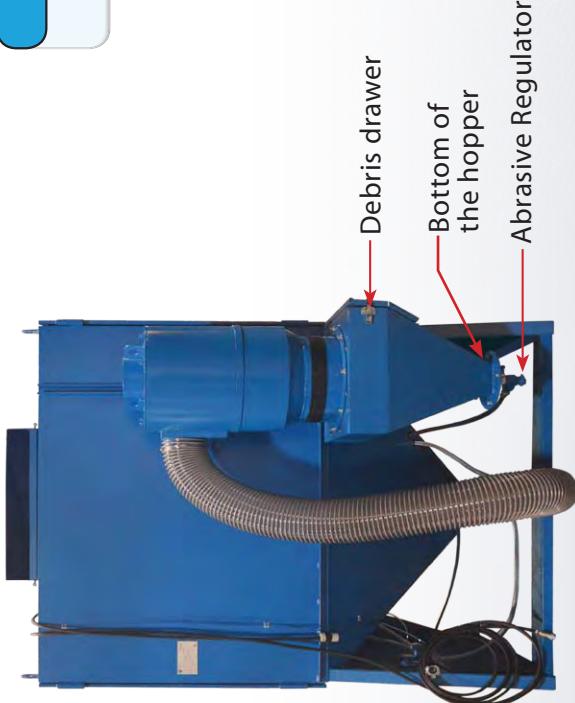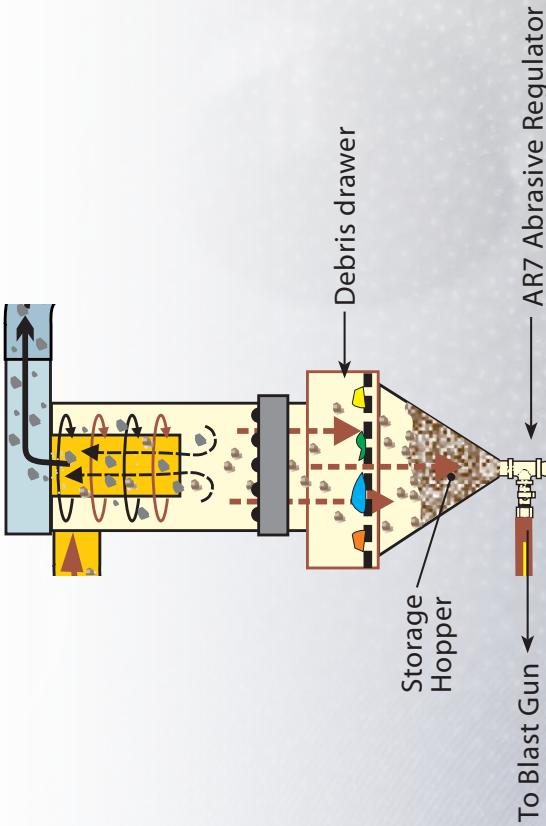

ISTblast is a registered trademark of  
International Surface Technologies

T: 877 629-8202  
info@istsurface.com

1050 Des Forges Street  
Hwy. 640 Industrial Park  
Terrebonne, Quebec  
J6Y 0P6 Canada

**ISTblast**


## NOZZLE AND JET MAINTENANCE

**Nozzle:** check the nozzle regularly for wear using a drill bit **1/8"** larger than the **original nozzle diameter**

**IT GOES THROUGH**




**DOES NOT GOES THROUGH**

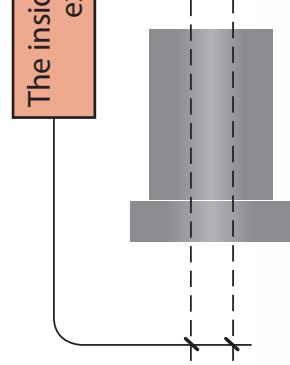

The inside diameter should never exceed 1/8" of wear

**Air Jet:** check regularly the wear of the injector and replace the rubber sheath if necessary to avoid wear from the outside

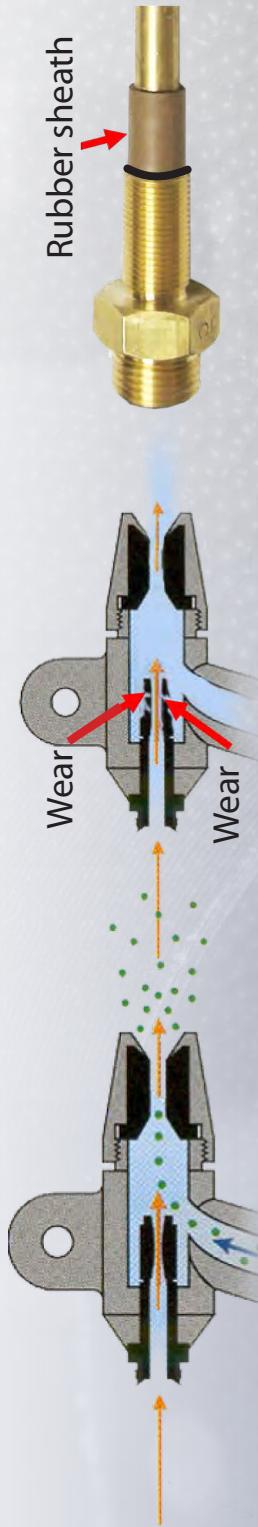

## PERIODICAL ADJUSTMENTS OF THE DCT1000 TIMER CONTROLLER

### DCT1000 TIMER CONTROLLER

Static pressure loss



High limit / Low limit

### MONITORING OF PRESSURE DROPS

The DCT1000 monitors the static pressure differential between the clean and the dirty sides of cartridge filters – so-called pressure drop. As the filters load with dust, the resistance to air flow increases, and so does the pressure drop.

Brand new cartridge filter set should indicate a process value between **0.2 and 1.0**. During the first few hours of operation, dust will build up on the cartridges' pores in order to reach their optimal filtration capacities – this process is commonly referred to as the "dust cake".

**High limit : 3.5**  
**Low limit : 2.0**

Once the new cartridges are saturated with a dust layer, the normal operating value should be between **2 and 3.5** – which are the initial **Low Limit** and **High Limit** defined in the DCT1000.

### CARTRIDGE CLEANING


When the process value reaches the **High Limit**, the cleaning cycle starts emitting a series of pulses of air through each cartridge in order to dislodge exceeding amount of dust buildups. Pulses of air can be heard when the cycle is on.

During the cleaning cycle, the pressure drops should decrease on each pulse until it reaches the **Low Limit** which interrupts the cleaning cycle.

High limit



REVERSE PULSE CLEANING

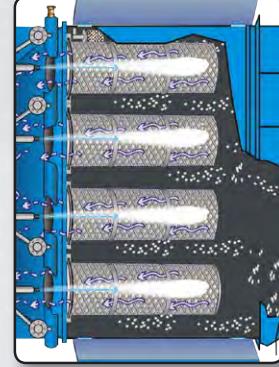

Low limit



## DCT1000 TIMER CONTROLLER

### INITIAL VALUES

**High limit : 3.5  
Low limit : 2.0**

Stagnant pressure drop



### PERIODICAL ADJUSTMENTS

Follow the procedure below in order to extend the life span of your cartridge filters while maximizing the filtration capacity of your dust collector.

When the cleaning process of the cartridges is no longer able to reach the **Low Limit** value, the cleaning cycle will run continuously.

At that moment, it is advised to increase the **Low Limit** and **High Limit** in order to extend the life span of the cartridge media to a certain limit.

Start increasing the **Low Limit** and **High Limit** of the cleaning process by 2 decimals above the stagnant value. For example, if the cleaning cycle runs continuously and the process value on the DCT1000 indicates **2.2**, set the new **Low Limit to 2.4** and the new **High Limit to 3.9**.

### NEED TO REPLACE CARTRIDGES

#### **FINAL VALUES**

**High limit : 8.5  
Low limit : 7.0**

**NEW VALUES**

**High limit : 3.9  
Low limit : 2.4**

Keep increasing moderately until your cartridges are incapable of reaching a **Low Limit of 7.0**. At that moment, it is time to change your cartridge filters and reset your process values to initial **Low Limit 2.0** and **High Limit 3.5**.



### REPLACEMENT OF CARTRIDGE FILTERS

Change all your cartridge filters at the same time, regardless of their individual condition.

If you notice a damaged cartridge, immediately replace all your cartridge filters at once – if a cartridge filter is damaged and/or perforated, it may cause severe damage to your impeller and mislead the DCT1000 timer controller in its ability to control the cartridges cleaning cycles properly.

**Refer to the owner's manual for parts number and changing procedure.**

## DCT1000 TIMER CONTROLLER

### SETTINGS

Use the (Select) and (Up) (Down) keys you will be able to change the parameters.

Note: Your unit has been programmed in the factory, if you change some settings during operation be sure to write down the initial values.

### PARAMETERS

**Process:** Value displayed during operation of the fan (inches of water restriction cartridges).

**Last Output:** Number of active solenoid (this value can not be changed because the system auto-detects the number of active coil connected to the card).

**Time Off:** downtime between each pulse (value 10 seconds).

**ON Time:** Time pulse valves (value 250 milliseconds).

**High Limit:** The value to which the cleanup will begin (value between 2.5 and 3.5).

**Low limit:** The value to which the cleaning will stop automatically (value between 1.5 and 2.5).

**High Alarm:** Value must be reached to activate alarm (High limit value 2).

**Low Alarm:** Value must be reached to activate alarm (value = 0).




**Cycle Delay:** This value is to operate in manual mode (value = 0).

**Down Time Cycles:** This value is to operate in manual mode (value = 0).

**Auto Alarm Reset:** This value is to operate in manual mode (value = 0).




## TROUBLESHOOTING

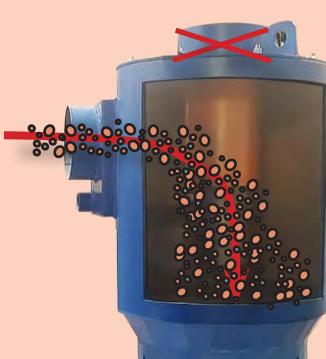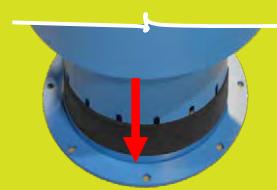TYPE OF FAILURE	POSSIBLE CAUSE	SOLUTION
	 <p>Air intake behind the cabinet obstructed</p>	Check the trap above the cabinet to make sure it is open and clear
	<p><b>Clogged filter media:</b></p> <ol style="list-style-type: none"> <li>1. Dust barrel filled</li> <li>2. Bags shaken during cabinet operating<sup>1</sup></li> </ol>	<ol style="list-style-type: none"> <li>1. Empty the dust barrel as well as the connection hose connecting the barrel and the cyclone separator</li> <li>2. Replace clogged bags<sup>2</sup></li> </ol>
	<p>Dust collector fan motor connected upside down (blades turn upside down)</p>	<p>Reverse motor electric connection</p> 
<b>Excessive dust in the cabinet (poor visibility) and / or very dusty abrasive (inefficient)</b>	<p>Poor adjustment of the cyclonic separator (the dust recirculates in a loop instead of being evacuated to the dust collector and mixes with the abrasive)</p> 	<ol style="list-style-type: none"> <li>1. If the material has changed since the cabinet was manufactured, contact an IST representative</li> <li>2. If the material has not changed since the cabinet was manufactured, slightly open the rubber band around the cyclonic separator to increase the velocity, observe the results on the abrasive level after a few hours of blasting</li> </ol> 

<sup>1</sup>Never shake the bags while the dust collector fan is on. This forces dust to enter the pores of the media rather than lodge on the surface.



<sup>2</sup>Do not wash bags with water or by blowing compressed air through them. Both of these methods will damage the bags and make them obsolete.

## TROUBLESHOOTING (CONT'D)

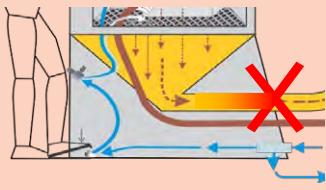TYPE OF FAILURE	POSSIBLE CAUSE	SOLUTION
	<p>Non-recyclable abrasive<sup>3</sup></p> 	Follow abrasive drain and cleaning procedures and replace with recyclable abrasive.
<b>Excessive dust in the cabinet (poor visibility) and / or very dusty abrasive (inefficient)</b>	<p>Suction hose (behind the cabinet) partially or completely blocked</p> 	Follow the procedures for resolving a clogged suction hose
<b>Suction hose outlet (behind the cabinet) partially or completely blocked</b>	<p>Poor filling procedure: too much abrasive or spilled too quickly</p> 	Open the service door (1) and disconnect the abrasive suction hose (2) at the bottom of the hopper, remove the abrasive in excess and repeat the filling procedures properly.
	<p>Lack of cfm (problem with the dust collector) which causes the outlet to become progressively blocked</p>	Follow the procedures for resolving a dusty cabinet as described above






<sup>3</sup> Never use non-recyclable abrasive in IST cabinets, such as slag, silica sand, recycled glass, or other like them. IST cabinets are designed to be used exclusively with recyclable abrasive that generates a limited amount of dust. Ask your IST representative for more information.

## TROUBLESHOOTING (CONT'D)




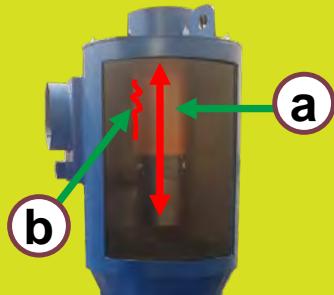
TYPE OF FAILURE	POSSIBLE CAUSE	SOLUTION
<b>"Good" abrasive ends up in the dust container of the dust collector</b>	Incorrect adjustment of the rubber band of the cyclonic separator	 <p>Cover gradually the holes with the rubber band to reduce the velocity flowing through the cyclonic separator</p>
<b>Too much velocity (cfm) in the cyclone separator</b>	The seal around the debris drawer is damaged or not properly installed	 <p>Check the gasket around the drawer to make sure it is tight and replace if necessary.</p>
	<ul style="list-style-type: none"> <li>a. The central tube of the cyclonic separator is not adjusted properly due to a change of abrasive</li> <li>b. The central tube of the cyclonic separator is perforated at the inlet of the separator</li> </ul>	 <p>Contact your IST representative</p>

<sup>4</sup>The center tube of the cyclonic separator is factory adjusted for the abrasive specified at the time of purchase. If the abrasive changes during operation, it may be necessary to readjust the inner tube to alter the movement and flow of air within the cyclonic separator.


## TROUBLESHOOTING (CONT'D)

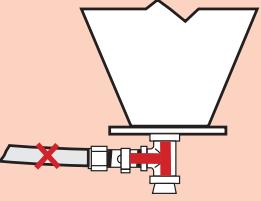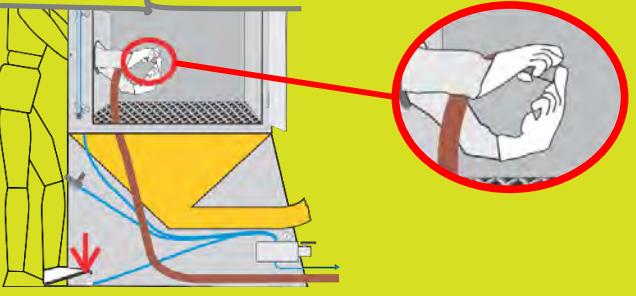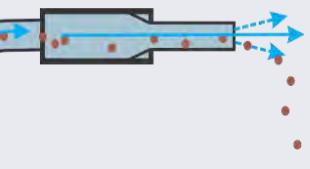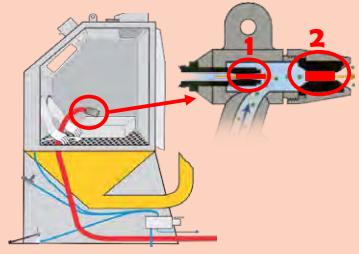TYPE OF FAILURE	POSSIBLE CAUSE	SOLUTION
	Incorrect adjustment of the AR ¾ Abrasive Valve	 <p>Slightly close the opening of the AR ¾ valve and test again : <b>Less air = more abrasive</b></p>
Lack of abrasive in the mix (the nozzle blows mainly air)	 <p>Blocked AR ¾ abrasive valve and/or abrasive transport hose to nozzle</p>	<ol style="list-style-type: none"> <li>Place a finger at the nozzle opening to obstruct the air outlet and activate the blaster to force air upstream of the nozzle to unblock it.</li> </ol>  <ol style="list-style-type: none"> <li>If this does not solve the problem, disassemble the AR ¾ abrasive valve and transport hose in an attempt to isolate the obstruction.</li> </ol>
	 <p>Abrasive transport hose to nozzle is obstructed (gun) or improperly installed. Wrong air jet to nozzle opening ratio. The ratio should be 2 to 1 (nozzle inner diameter = 2 times air jet inner diameter)</p>	<ol style="list-style-type: none"> <li>Inspect the hose for holes (especially under the screened floor if it has been exposed to abrasive blasting) and replace as necessary.</li> <li>Remove the gun from the hose and insert it again to the bottom of the hose.</li> </ol>
		<p><b>Disassemble the gun and check the nozzle and the air jet for wear:</b></p> <ol style="list-style-type: none"> <li>If the nozzle is damaged by excessive wear from the outside, replace it.</li> <li>If the internal diameter of the nozzle exceeds 1/16" of its original size, replace it.</li> </ol>

## TROUBLESHOOTING (END)

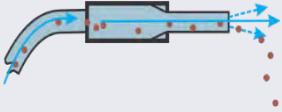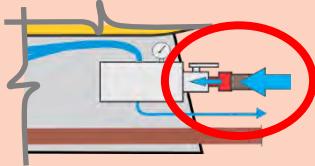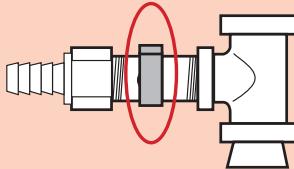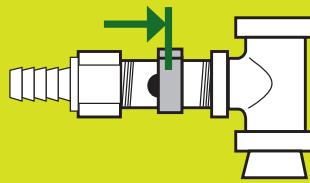TYPE OF FAILURE	POSSIBLE CAUSE	SOLUTION																																																
Lack of abrasive in the mix (the nozzle blows mainly air)  	Air supply problem (using a quick connect or a connection that creates a restriction to the cabinet air supply)  	<p>Follow cabinet air connection guidelines (see chart page 8)</p> <table border="1" data-bbox="959 572 1547 762"> <thead> <tr> <th rowspan="2">Buse ID</th> <th colspan="6">Pressure (psi)</th> </tr> <tr> <th>40</th> <th>50</th> <th>60</th> <th>70</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>1/4"</td> <td>12</td> <td>15</td> <td>17</td> <td>19</td> <td>21</td> <td>26</td> </tr> <tr> <td>5/16"</td> <td>19</td> <td>23</td> <td>27</td> <td>30</td> <td>34</td> <td>42</td> </tr> <tr> <td>3/8"</td> <td>27</td> <td>33</td> <td>38</td> <td>43</td> <td>48</td> <td>58</td> </tr> <tr> <td>7/16"</td> <td>38</td> <td>46</td> <td>52</td> <td>60</td> <td>65</td> <td>80</td> </tr> <tr> <td>1/2"</td> <td>49</td> <td>58</td> <td>67</td> <td>76</td> <td>85</td> <td>94</td> </tr> </tbody> </table> <p>And use only straight couplings as indicated in the manual</p>	Buse ID	Pressure (psi)						40	50	60	70	80	100	1/4"	12	15	17	19	21	26	5/16"	19	23	27	30	34	42	3/8"	27	33	38	43	48	58	7/16"	38	46	52	60	65	80	1/2"	49	58	67	76	85	94
Buse ID	Pressure (psi)																																																	
	40	50	60	70	80	100																																												
1/4"	12	15	17	19	21	26																																												
5/16"	19	23	27	30	34	42																																												
3/8"	27	33	38	43	48	58																																												
7/16"	38	46	52	60	65	80																																												
1/2"	49	58	67	76	85	94																																												
Too much abrasive in the mix (the jet is jerky and discharges too much abrasive)  	Incorrect adjustment of the AR ¾ abrasive metering valve  	<p>Slightly open the orifice of the AR ¾ valve :  <b>More air = less abrasive</b></p> 																																																


## SCHEMATIC OF UNIT

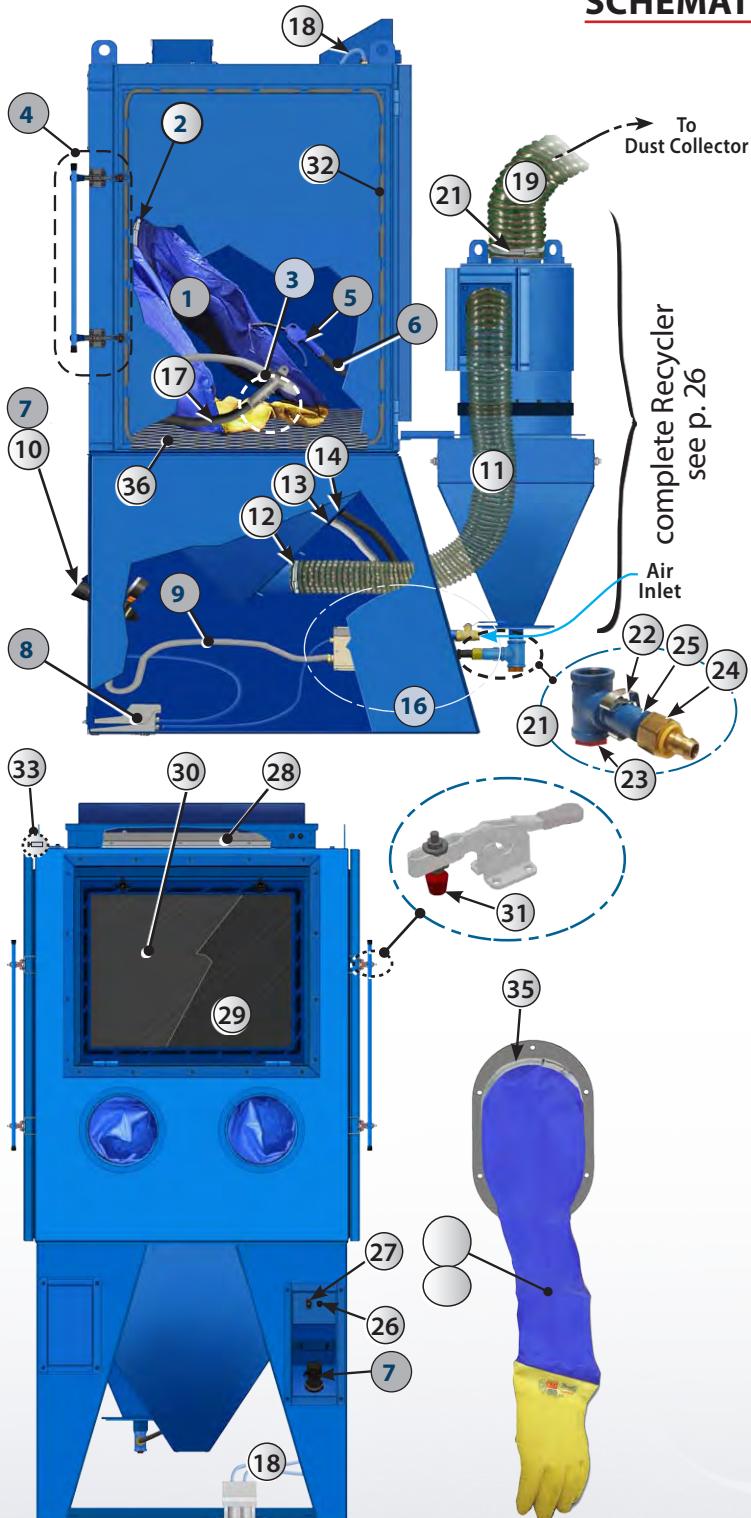

35	624137	10" Hose Clamp for large gloves
	610453	28" x 44"
	610458	36" x 36"
	610459	36" x 48"
36	610462	42" x 48"
	610463	48" x 48"
	610469	48" x 60"
	610465	60" x 60"

#	Part #	DESCRIPTION
1	603212	Gloves with nylon sleeves, 8" Ø ID x 30" lenght
	603205	Gloves with leather sleeves (Optional)
2	624128	8" ø Gloves Clamp
3	610120	G5 CN2-5 Gun (see page 30)
4	610288	Standard Door Handle
5	610275	Dust-off Blowgun
6	606147	1/4" Multipur. Hose (sold by foot)
7	611022	1/2" Pressure Gauge
8	610345	Complete Foot Pedal (see page 31)
9	606104	1/2" Air Hose
10	611022	1/4" Pressure Regulator
11	606120	5" – 600 cfm Abrasive Transport Hose
11	606123	6" – 900 to 1 800 cfm Recycler Hose
12	624121	5" Hose Clip
12	624124	6" Hose Clip
13	618126	1/2" Air Hose Grommet
14	618127	1/2" Abrasive Hose Grommet
16		1/2" Complete Suction Tree (see page 25)
17	606148	1/2" Multipur. Hose (sold by foot)
18	324571	1/4" Blue poly. Tube
	606169	6" – 600 cfm Suction Hose
19	606171	7" – 900 cfm Suction Hose
	606173	8" – 1200 cfm – 1800 cfm Suction Hose
	624124	6" ø Hose Clip
20	624127	7" ø Hose Clip
	624128	8" ø Hose Clip
21	608010	AR¾ Abrasive Regulator
22	608011	AR¾ Clip
23	939143	AR¾ Abrasive Regulator plastic threaded plug
24	632960	3/4" FPT x 1/2" Adaptor
25	630505	SP 3/4" x 3" lg. Nipple
26	917863	AJC 20A - 250V Fuse
	616907	Fuse Holder
27	617014	ON/OFF Switch for Automatic Shacker
28	617161	24" Lighting c/w LED (cabinet less than 48")
	617160	48" Lighting c/w LED (cabinet 48" and more)
	610212	23 3/4" x 18 3/4" Safety Laminated Glass (cabinet less than 48")
29	610211	17" x 48" Safety Laminated Glass (cabinet 48" and more)
	618318	1/2" x 1/4" Window Seal (sold by foot)
	613038	RPW 50 – 23 3/4" x 18 3/4" Protective Visor
30	613035	RPW 1748 Protective visor (cabinet more than 48")
	910223	Toggle Stem Rod
	618322	« P » Type Rubber for door (sold by foot)
33	600116	OPTION : Complete Door Security Switch
34A	603217	Gloves with nylon sleeves, 8" Ø ID x 30" lenght
34B	603218	Large Leather Gloves Sleeves 10" ID x 30" Lg.

## 1/2" STD. PNEUMATIC TREE - EXPLODED VIEW

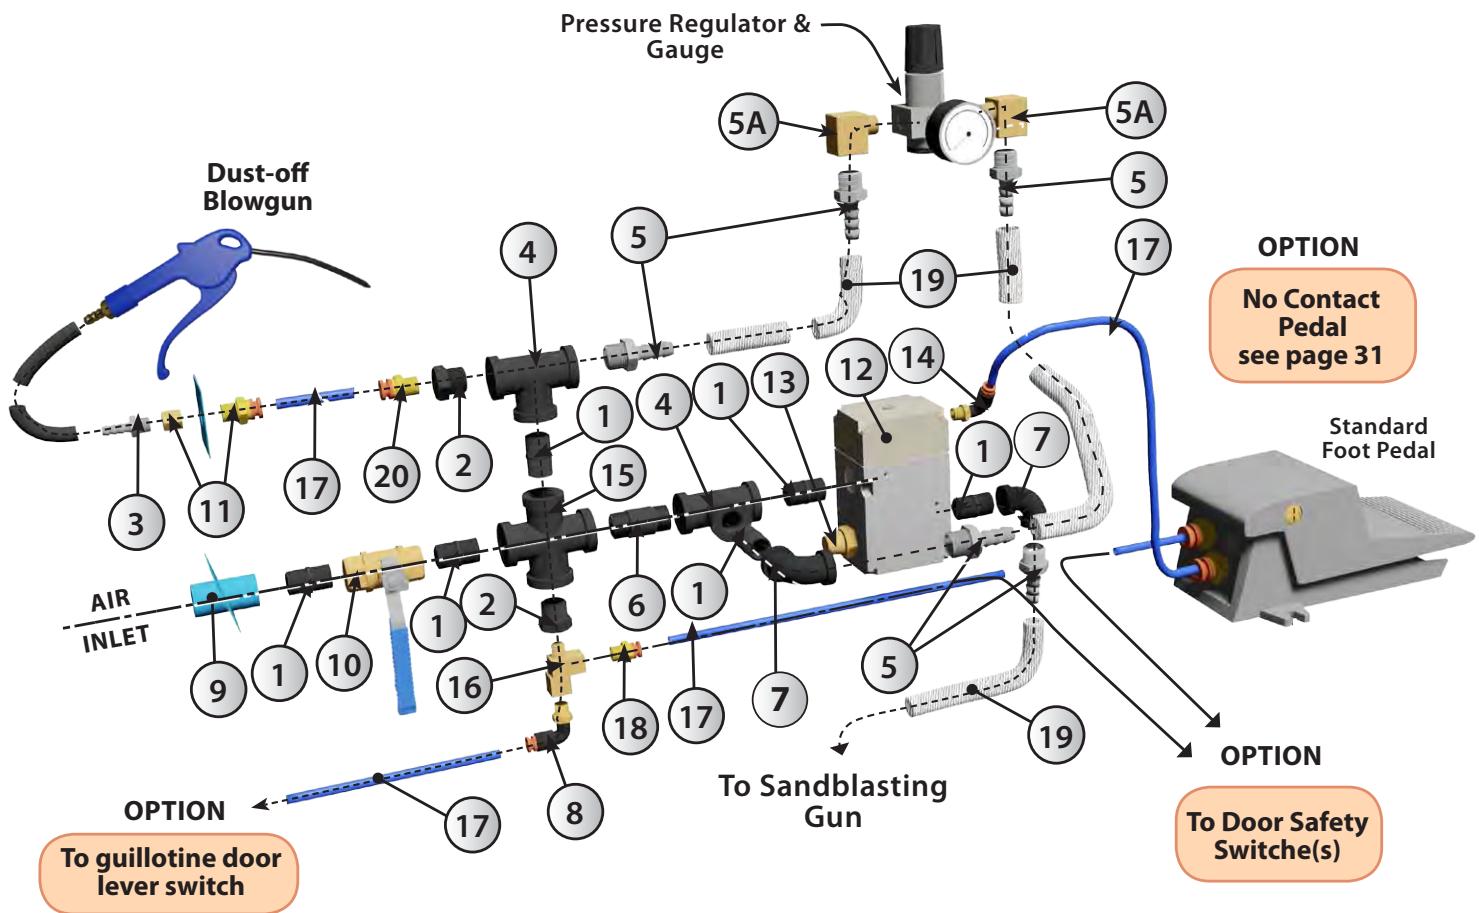

### PARTS LIST

#	Part #	DESCRIPTION	#	Part #	DESCRIPTION
1	630301	1/2" NPT Nipple	10	608102	1/2" FPT Ball Valve
2	632745	1/2" NPT x 1/4" NPT Reducer	11	324503	1/4" MTP x 1/4" TU Bulkhead Push-In
3	632270	1/4" NPT x 1/4" Hose Barb Fitting	12	608519	1/2" FPT Pilot Valve
4	630328	PA FPT 1/2" "T" Fitting	13	608287	1/2" MPT Muffler
5	632760	1/2" NPT x 1/2" Hose Barb Fitting	14	324561	1/8" NPT 1/4" TU @ 90° Push-In Fitting
5A	632730	1/2" PL MF Elbow Fitting	15	630327	1/2" Cross
6	932108	1/2" MPT x 3" Lg. Nipple	16	632226	1/4" T-Street
7	630340	1/2" FF PA Elbow	17	324571	1/4" Blue Poly. Tube
8	324560	1/4" NPT 1/4" TU @ 90° Push-In Fitting	18	324558	1/4" MTP 1/4" TU Push-In Fitting
9	610390	1/2" Inlet Ring	19	606104	1/2" Clear Nylon Hose

## M SERIES - RECYCLING BY CYCLONIC SEPARATOR

### COMPLETE RECYCLER

Cabinet Type	Outlet Type	13"	16"	24"	
Suction	Fan with motor	609188	609190	609192	
	Case without impeller	609242	609244	609246	
Pressure	Fan with motor	609189	609191	609193	
	Case without impeller	609243	609245	609247	

### OUTLET CASE TO DUST COLLECTOR

#	Description	13"	16"	24"	
1	Outlet Case	609212	609213	609214	
2	Fan with motor	609202	609203	609204	
3	Impeller	610526	610527	610528	
4	Motor	1 hp 616313	2 hp 616324	3 hp 616332	
5	Suction hose*	606169	606171	606173	


### CYCLONIC SEPARATOR

#	Description	13"	16"	24"	
1	Body	609230	609231	609232	
2	Support	609180	609181	609182	
3	Rubber Band		618334 (length : 41")		
4	Self-Adhesive Rubber*		618318		
5	Abrasive Conveyor Hose*	606120	606123	606124	
6	Exterior Wear Pad Option	609283	609284	609285	
7	Full internal reinforcement	609290	609291	609292	
8	Partial internal reinforcement	609272	609273	609274	

### STORAGE HOPPER

#	Description	13"	16"	24"	
1	Body		609286		
2	Support for Pressure		609197	S/O	
3	Support for Suction		609178	609174	
4	Adaptor for Suction		609287		
5	Self-adhesive foam*		618305		
6	Screening Grill		609903		
7	Door Latch		610269		


Items marked with «\*» are sold by foot

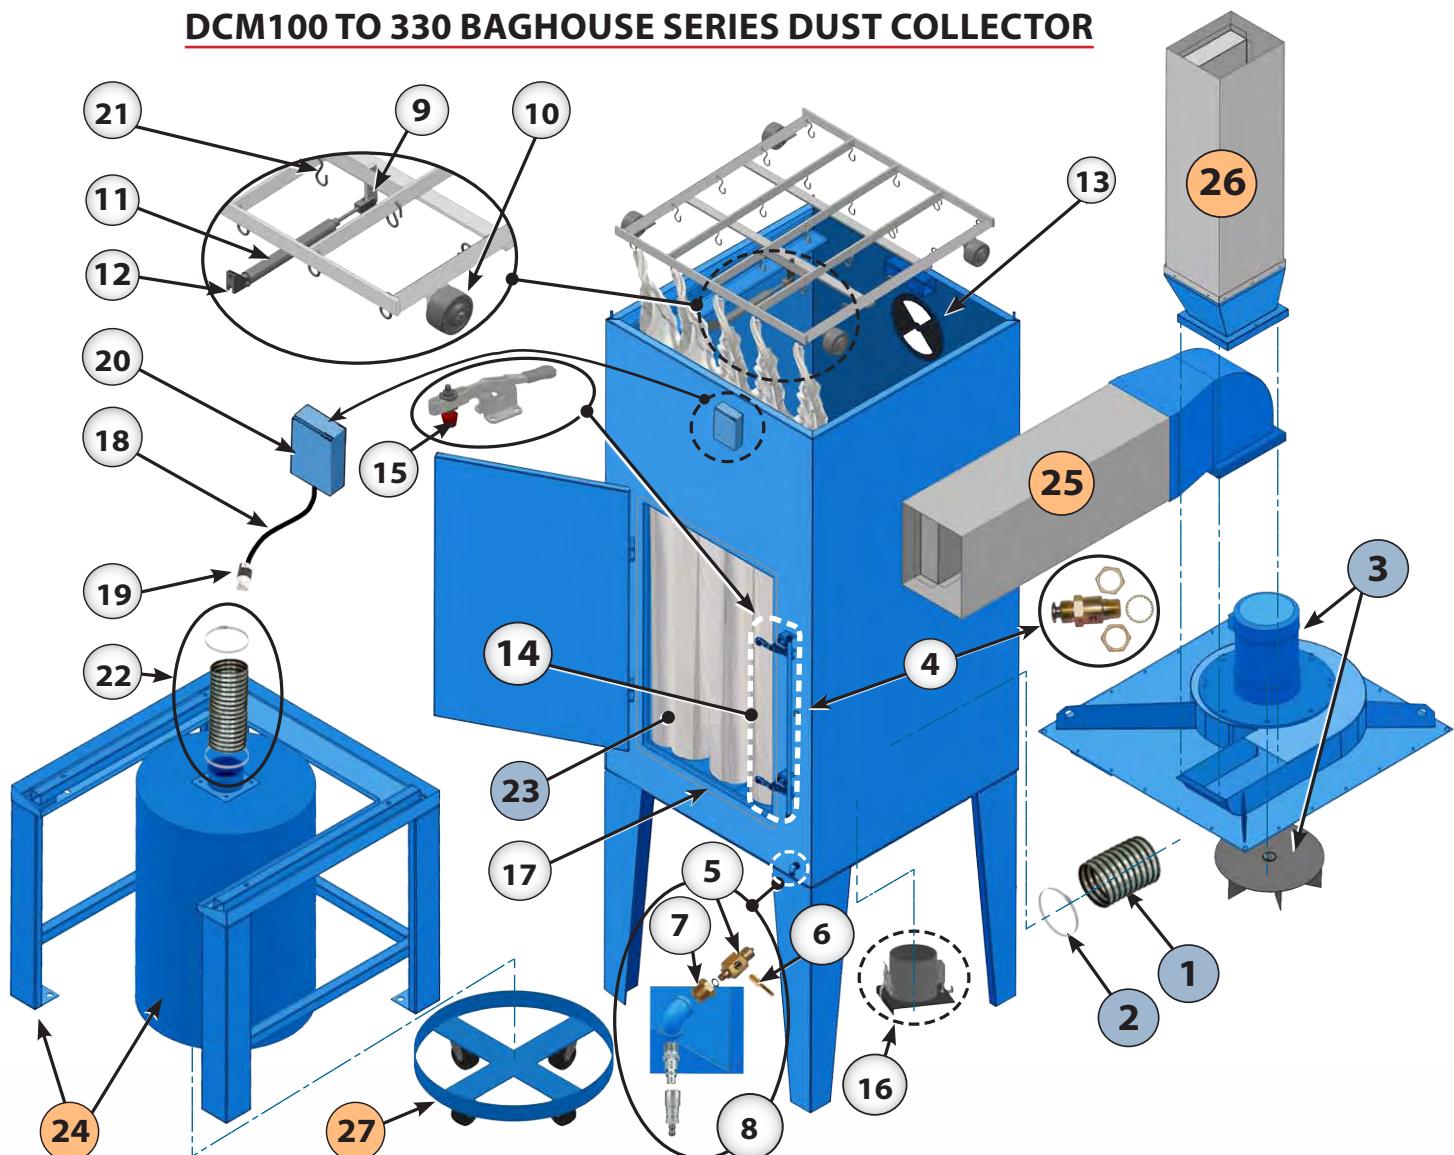**DCM100 TO 330 BAGHOUSE SERIES DUST COLLECTOR**

#	PART #	DESCRIPTION
1		Hoses : see table page 29
2		Clips : see table page 29
3		Fan Motor : see table page 29
4	608508	Pneumatic Shacker Button
5	608408	Flow Adjust 10-32 Slotted
6	632064	1/8" 10-32 MPT Hose Barb Fitting
7	608409	1/4" Reducer pour Flow Adjust
8	-/->	Air Inlet (1/4" M # 607222, & 1/4" F # 607219 Quick Connect)
9	608406	Clevis Rod
10	619005	2" Roller
11	608405	3/4" Ø x 3" stroke Cylinder
12	608407	Bracket for cylinder
13	610280	8" Adjustable Air Inlet
14	610287	Complete Door Handle

#	PART #	DESCRIPTION
15	910223	Door Toggle Stem
16	601378	Dust Trap
17	618321	"D" Type Rubber Seal (sold by foot)
18	616575	Electric Cable (sold by foot)
19	616406	Electric Plug
20	617063	Electric Box
21	601309	"S" Hook
22	609158	4" Dust Hose (sold by foot)
23		Dust Bags (see table page 29)
24		Option : Barrel & Extension Legs (see page 29)
25		Option : Horizontal Muffler (see page 29)
26		Option : Vertical Muffler (see page 29)
27		Trolley for Barrel

## DCM 600 TO 1800 CARTRIDGE DUST COLLECTOR SERIE - EXPLODED VIEW & PARTS

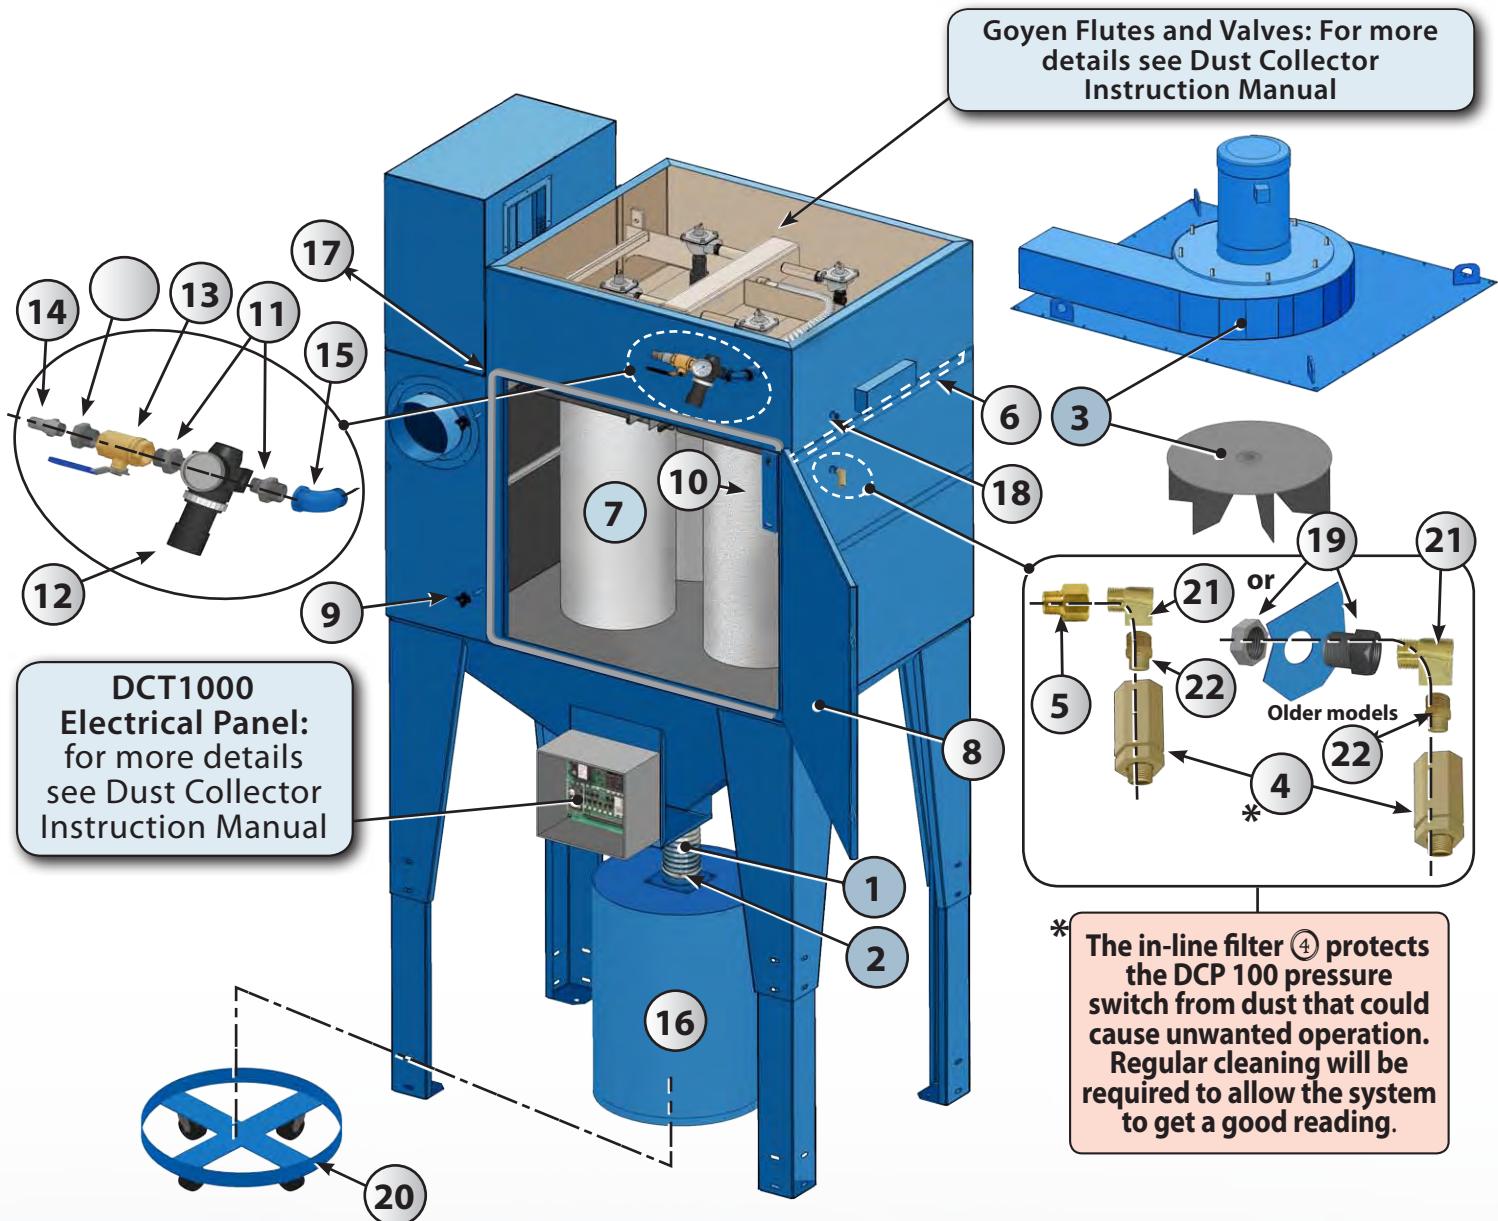


#	PART #	DESCRIPTION
1		Hoses : see table page 29
2		Clamps : see table page 29
3		Motor : see table page 29
4	611058	1/8" Inline Filter
5	632248	1/4" @ 1/8" HEX. Reducer
6	NPN	Cartridge Guide
7		Filtering Cartridge : see table p. 29
8	NPN	Access Door
9	940109	Star Knob
10	NPN	Cartridge Lock Key
11	630651	1" @ 1/2" Reducer
12	608022	1/2" Complete Pressure Regulator

#	PART #	DESCRIPTION
13	608102	1/2" Ball Valve
14	607222	1/4"-1/4" NPT Quick-Connect Fitting
14A	630351	1/2" @ 1/4" MF Reducer
15	630641	1" MF @ 90° Elbow
16	901448	30 gal Collecting Barrel
17	618321	« D » Type Rubber Seal (Sold by foot)
18	324560	1/4" NPT @ 1/4" TU Push-in Fitting
19	932004	1/4" FF Bulkhead Fitting
20	919325	Trolley for Barrel
21	630125	1/4" MF @ 90° Elbow
22	630141	1/4" @ 1/8" Reducer


## DUST COLLECTORS : MOTORS, HOSES AND BAGS OR CARTRIDGES

### FAN MOTOR & SUCTION HOSE

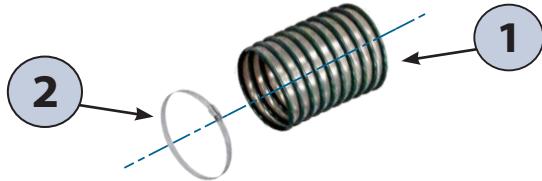

#### BARBED SUCTION HOSES AND CLAMPS

Fan Motor (hp)	Hose I.D.	Hose (1)	Clamp (2)
1/2	5"	606168	624121
1	6"	606169	624124
2	7"	606171	624127
3	8"	606173	624128
5	10"	606177	624137

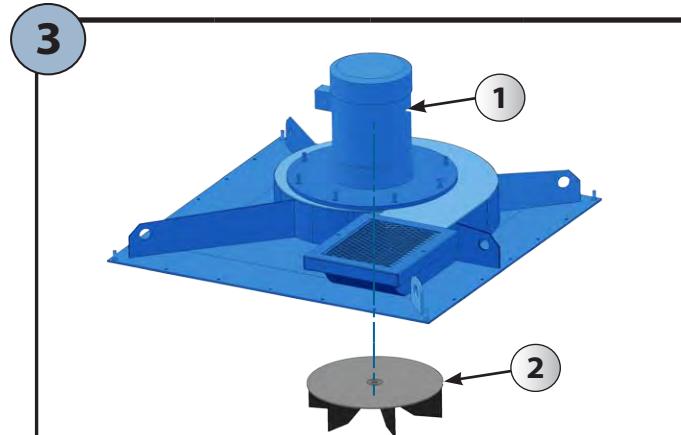

#### FAN MOTOR

Power (hp) (1)	Voltages		Fan (2)
	240 V	380 V	
1/2	IST	S/O	610525
1	IST	S/O	610526
2	IST	S/O	610527
3	S/O	IST	610528
5	S/O	IST	610529
7.5	S/O	IST	IST
10	S/O	IST	IST

#	PART #	DUST BAGS
23	601316	DC 100 : DB6HP Dust Bags (Qty : 16)
		DC 160 : DB6HP Dust Bags (Qty : 25)
		DC 230 : DB6HP Dust Bags (Qty : 36)
	601308	DC 330 : DB9HP Dust Bags (Qty : 36)

#### FILTERING CARTRIDGES

#	PART #	MODEL	QTY
7	901321	DCM600	2
		DCM900	
		DCM1200	4
		DCM1800	




#### BAGHOUSE DUST COLLECTOR OPTIONS

DCM MODEL	OPTION Nb.	BARREL CAPACITY (gal)	OPTION DUST BARREL & LEGS (24)	HORIZONTAL MUFFLER (25)	VERTICAL MUFFLER (26)
			(24)		
*DCM-100-4	601486	15		601434	601423
DCM-100	601486	15		601434	601423
DCM-160	601487	30		601435	601424
DCM-230	601490	30		601436	601425
DCM-330	601490	30		601437	601426

\* For ECAB pressure cabinet only.

## G5 BLAST GUN - EXPLODED VIEW & PARTS LIST

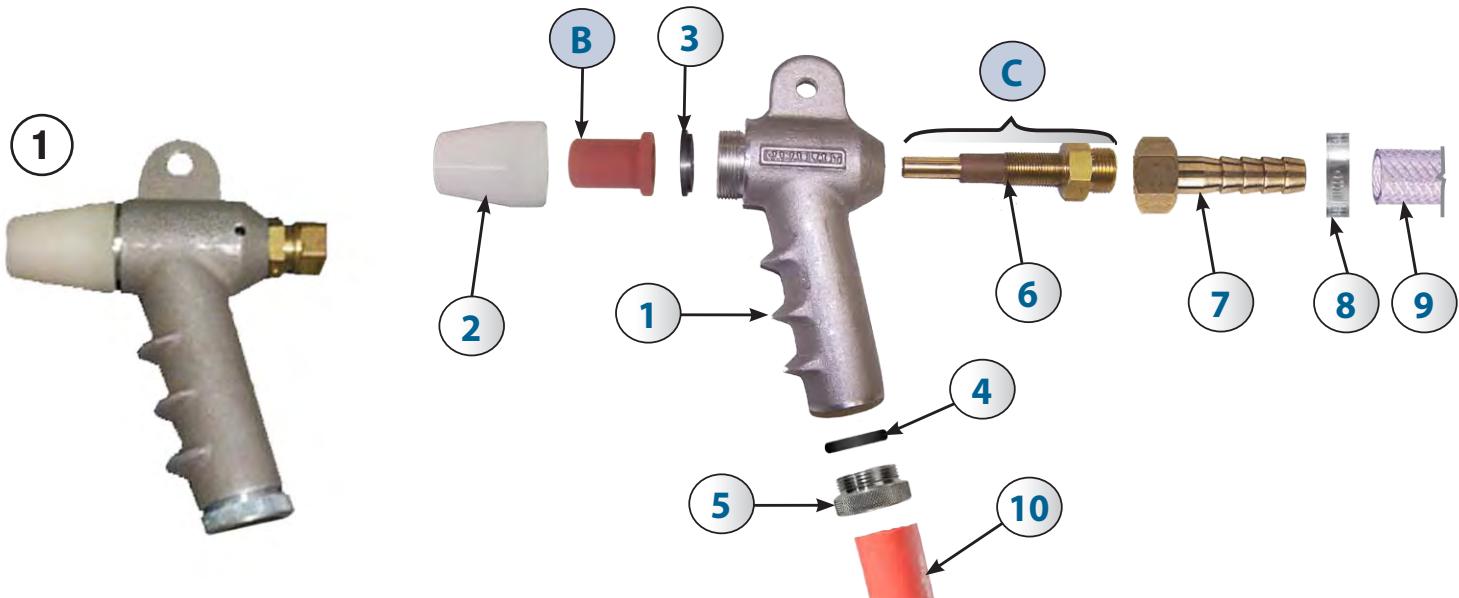


## G5 BLAST GUN - AIR JET / NOZZLES COMBINATIONS

<b>1</b>	G5 COMPLETE BLAST GUN (PRE-ASSEMBLED*)		B NOZZLES			<b>C</b>	ORIFICES ±
	G5	NOZZLES	TYPE	ORIFICE	CODE		
610121	CERAMIC	CN2-4	1/4"	605004	610116	1/8"	
610120	CERAMIC (STANDARD)	CN2-5	5/16"	605005	610117	5/32"	
610166	CERAMIC	CN2-6	3/8"	605015	610109	3/16"	
610122		CN2-7	7/16"	605006	610118	7/32"	
610123	TUNGSTEN	TN2-4	1/4"	605007	610116	1/8"	
610124		TN2-5	5/16"	605008	610117	5/32"	
610167		TN2-6	3/8"	605018	610109	3/16"	
610125		TN2-7	7/16"	605009	610118	7/32"	
610126	BORON CARBIDE	BN2-4	1/4"	605010	610116	1/8"	
610127		BN2-5	5/16"	605011	610117	5/32"	
610168		BN2-6	3/8"	605021	610109	3/16"	
610128		BN2-7	7/16"	605012	610118	7/32"	

## SPARE PARTS

Pre-assembled gun	1	610119	Blast Gun Body only	6	618219	Rubber Protector
	2	607037	Nozzle Adaptor	7	632771	1/2" Brass Female Swivel Hose Barb
	3	618017	NW-2 Rubber Washer	8	624015	3/4" O-Clamp
	4	618112	O-Ring	9	606104	1/2" PCV Compressed Air Hose (sold per foot)
	5	607038	Hose Adaptor	10	606148	1/2" Multipurpose Abrasive Conveying Hose (sold per foot)



## STANDARD FOOT PEDAL - PARTS DETAIL

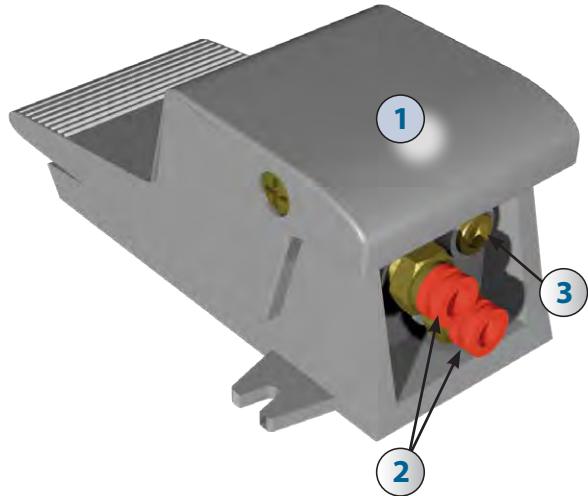

#	STOCK	DESCRIPTION
1	908065	Pneumatic Foot Pedal (complete)
2	950264	1/4" Push-in Fittings
3	950265	1/4" Brass Plug


## NO-CONTACT FOOT PEDAL (OPTIONAL)

### PEDAL & PARTS

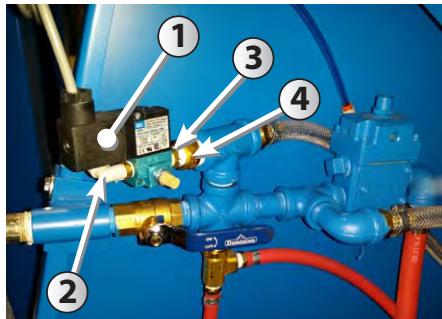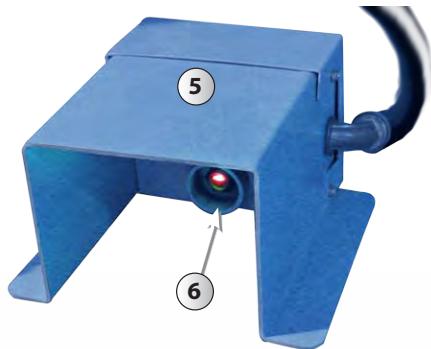

#	STOCK	DESCRIPTION
1	608568	SOLENOID VALVE
2	324561	1/8" PUSH-IN FITTING
3	632214	ADAPTER 1/8" TO 1/4"
4	632745	ADAPTER 1/2" TO 1/4"
5	910525	COMPLETE NO-CONTACT FOOT PEDAL
6	917879	INFRARED SENSOR CELL

## CONTROL PANEL WITH PARTS

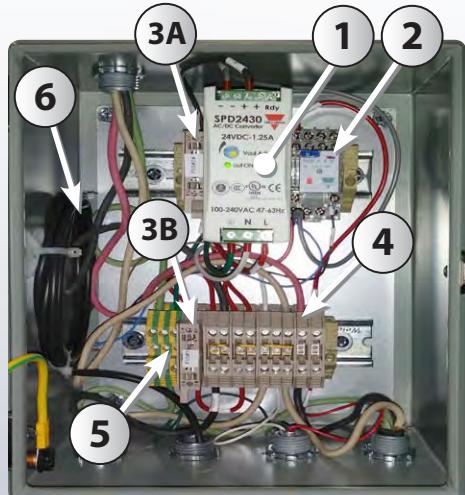


#	STOCK	DESCRIPTION
1	917618	24V DC - POWER SUPPLY
2	917877	24V DC RELAY
3A	917893	MDL.2A FUSE
3B	616933	AGC-1A FUSE
4	-/-	TERMINAL BLOCKS
5	616865	GROUND BLOCKS
6	917880	SENSOR CABLE

## RECOMMENDED SPARE PARTS


Description	Configuration	Part No	Qty
<b>Cabinet</b>			
Nylon Gloves	All models	603212	1
Nozzle 5/16" ID*		605011	1
Air Jet 5/32" ID*		610117	1
"Blast Hose (sold by foot)"	2636-2844-3636-3648-4248-4848	606148	7
	3660-3672-4860-4872-6060-6072	606148	10
Safety Glass	2636-2844-3636-3648-4248-4848	610212	1
	3660-3672-4860-4872-6060-6072	610211	5
Window Shield	2636-2844-3636-3648-4248-4848	613038	1
	3660-3672-4860-4872-6060-6072	613035	5
Reclaiming Hose	DCM100-DCM600	606120	8
	DCM100-DCM600	606123	8
	DCM160-DCM900	606124	8
<b>Dust Collector</b>			
Filtering Bag	DCM100	601316	16
	DCM160		25
	DCM230		36
Filtering Cartridge	DCM600	901321	2
	DCM900		2
	DCM1200		4
Dust Carrying Hose	DCM100-DCM600	606169	12
	DCM160-DCM900	606171	12
	DCM230-DCM1200	606173	12

\*Corresponds to the standard items and may not reflect your actual cabinet configuration.

## PNEUMATIC DIAGRAM

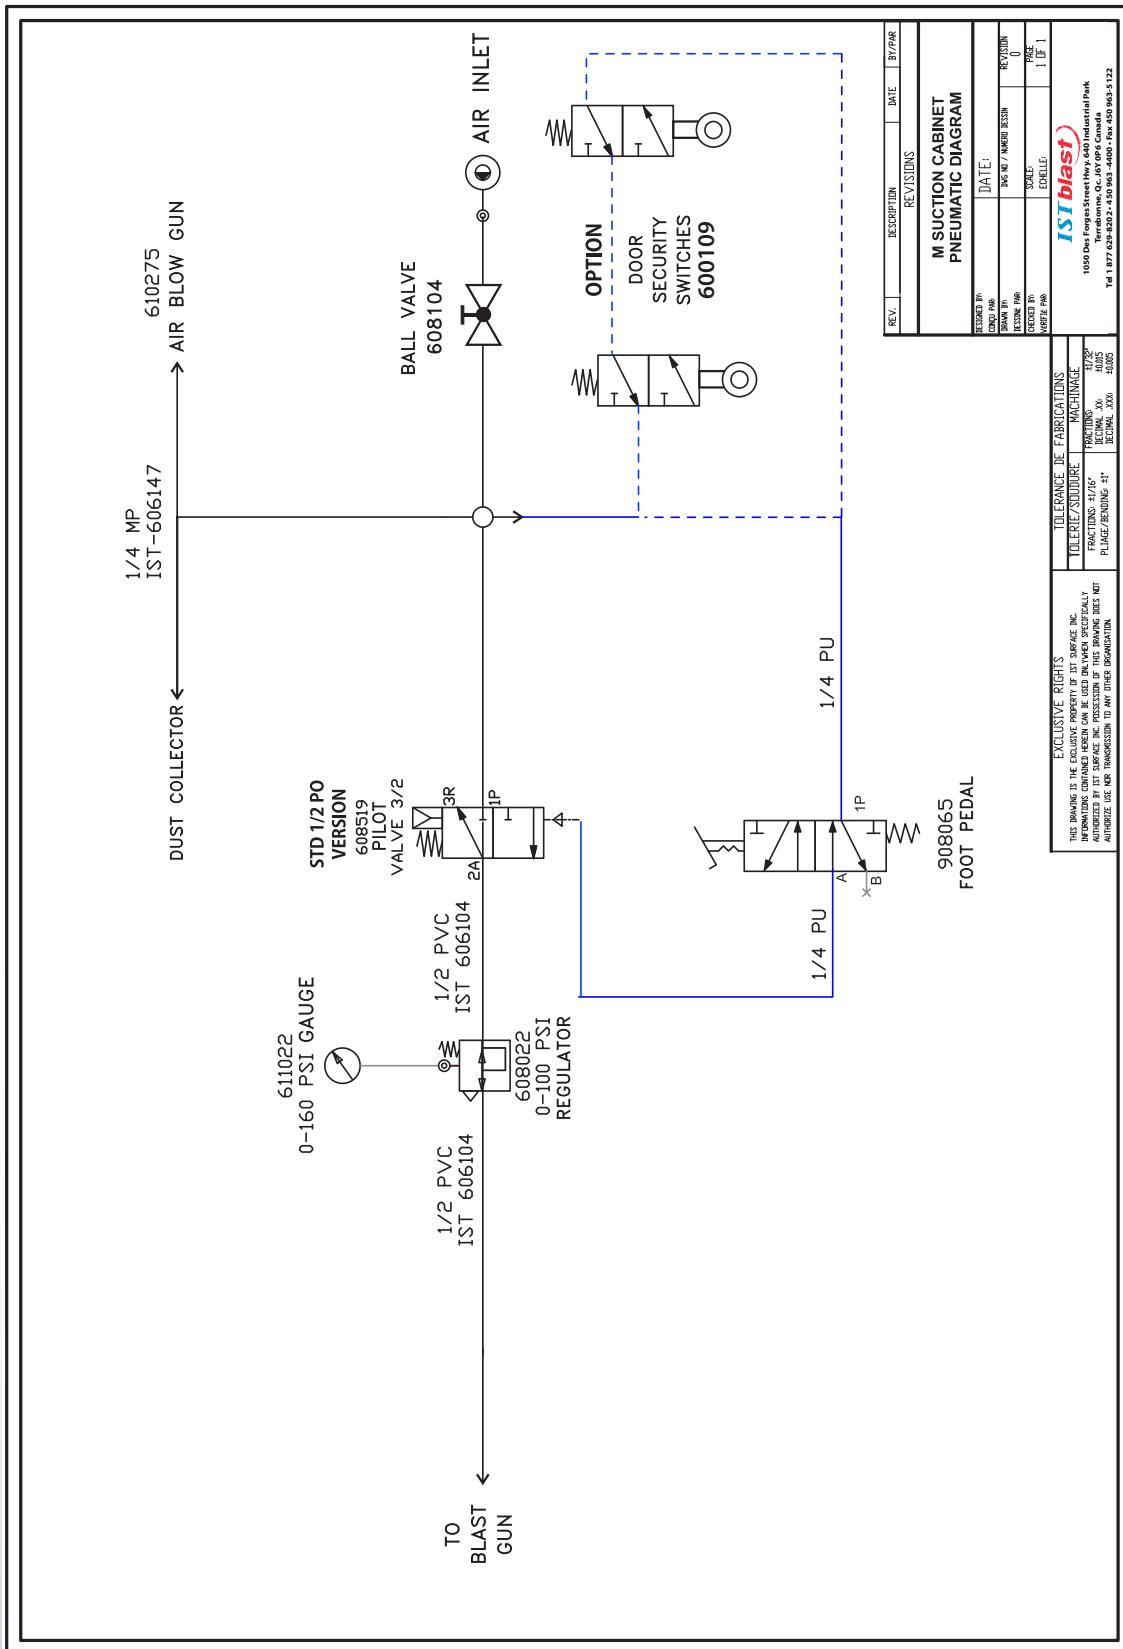

ELECTRICAL SCHEMATIC WITH DCM 50 TO 330 BAG-TYPE - 1 PH - DRAWING

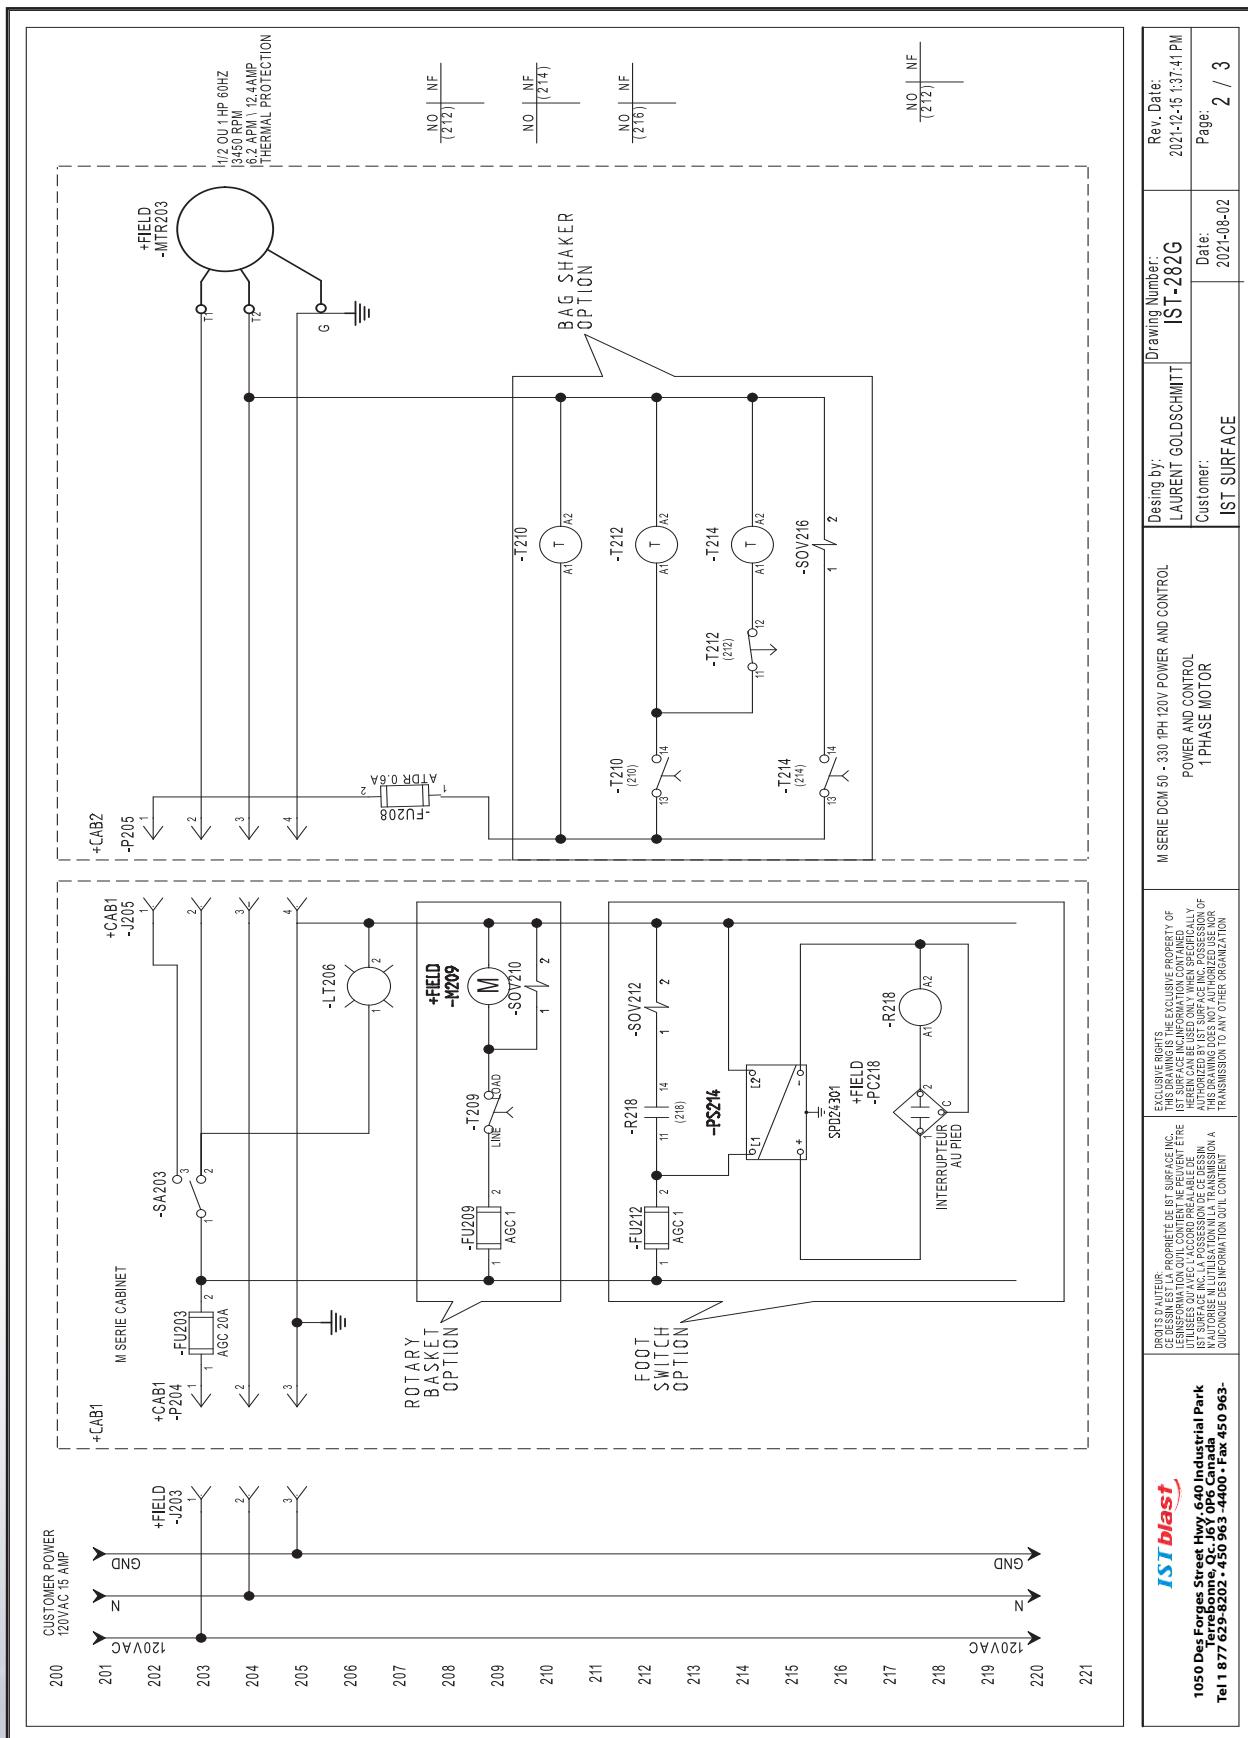

ELECTRICAL SCHEMATIC WITH DCM 50 TO 330 BAG-TYPE - 1 PH - PARTS LIST

**1050 Des Forges Street Hwy. 640 In  
Terrebonne, QC J6Y 0P6 Can  
Tel 1.877.629.8202 - 450.963.4400**


**1050 DesForges Street Hwy, 640 Industrial Park  
Tolone, Nova Scotia, B2N 2B2, Canada  
Tel 902-677-6299-8202, Fax 450-963-3632**

DROITS D'AUTEUR. PROPRIÉTÉ DE DÉSIS SURFACE INC. CE DÉSIN EST LA PROPRIÉTÉ EXCLUSIVE DE DÉSIS SURFACE INC. TOUTE UTILISATION NON AUTORISÉE DE CE DÉSIN EST UN VIOLATION DE LA LOI SUR LE DROIT D'AUTEUR. TOUTE UTILISATION NON AUTORISÉE DE CE DÉSIN EST UN VIOLATION DE LA LOI SUR LE DROIT D'AUTEUR.

**EXCLUSIVE PROPERTY OF  
MITSUBISHI ELECTRIC CORPORATION  
OF AMERICA INC.** USE  
ONLY WHEN SPECIFICALLY  
AUTHORIZED BY THE MANUFACTURER.  
NOT FOR PUBLIC USE NOR  
FOR SURVEYING PURPOSES.

Customer: IST SURFACE Drawing number: IST-282G Rev.: Page Rev. Date: 2021-12-16 8:53:16 AM  
Drawing by: LAUNDRY COUNTERTOP Page: 3 / 3

## ELECTRICAL SCHEMATIC WITH DCM 50 TO 330 BAG-TYPE - 3 PH - DRAWING

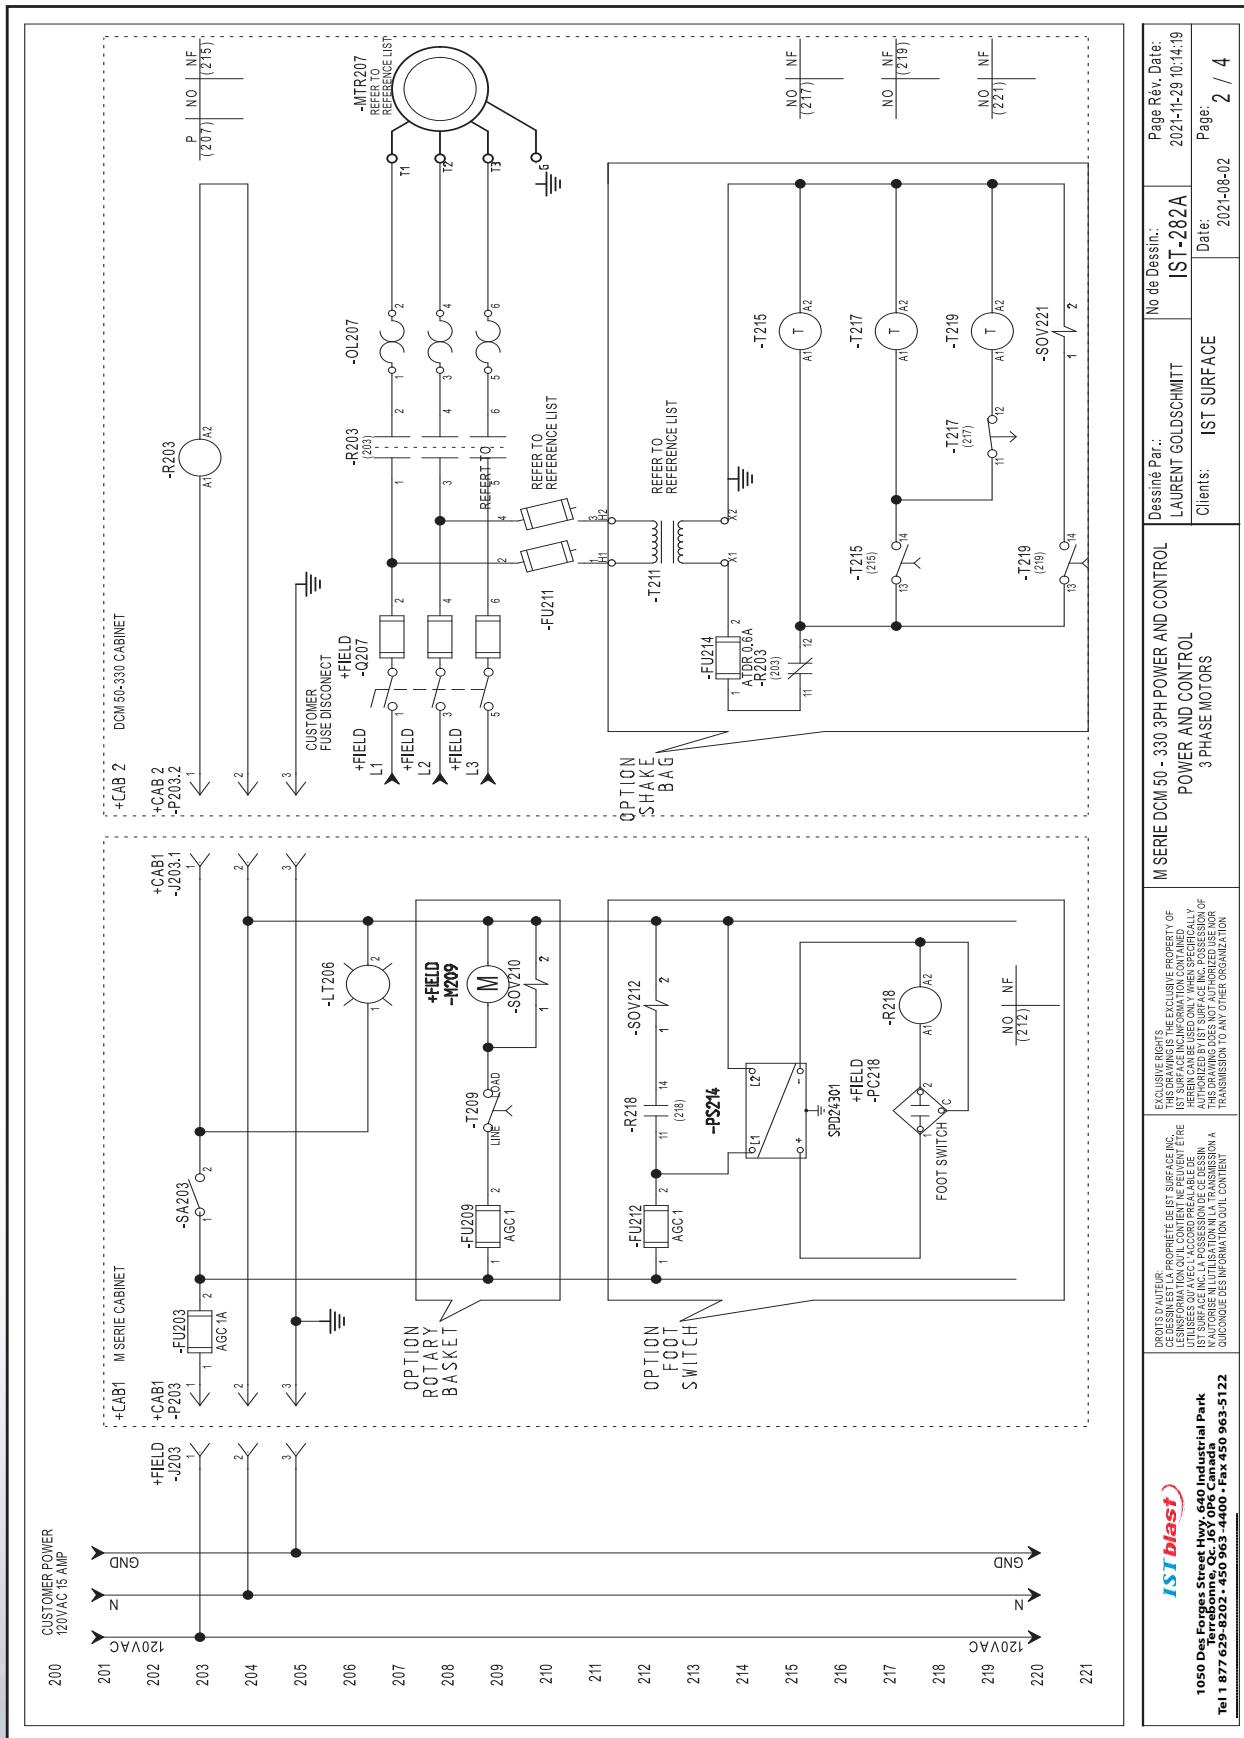

ELECTRICAL SCHEMATIC WITH DCM 50 TO 330 BAG-TYPE - 3 PH - PARTS LIST

Fonction	Localisation	Tag	Material (Cat. No.)	Series	Cat. No. Description	Supplier
+CAB1	-FU203	HKP-HRR			FUSE HOLDER E-3/RB-4x6-FL	BUSSMAN
+CAB1	-FU203	AGC1			GLASS FUSE 1AMP	FERRAZ
+CAB1	-FU209	AGC1			GLASS FUSE 1AMP	FERRAZ
+CAB1	-FU209	HKP-HRR			FUSE HOLDER E-3/RB-4x6-FL	BUSSMAN
+CAB2	-FU211	REFER TO			REFER TO REFERENCE LIST	SCHNEIDER ELECTRIC
+CAB1	-FU212	1040			FUSE BLOCK VUSH-4	WEINMULLER
+CAB2	-FU214	HKP-HRR			FUSE HOLDER E-3/RB-4x6-FL	BUSSMAN
+CAB2	-FU214	A1DR1			FUSE TA 60V TYPE CC TIME DELAY	FERRAZ
+FIELD	-J203	CUSTOMER			CUSTOMER USE DISCONNECT	CUSTOMER
+CAB1	-J203.1	5269C			15 Amp 250V - Straight Blade Socket	HUBBELL
+FIELD	-LT206	2SLSTP20040DD20W/ASLS P4040D(2)			STRIPLED 24V / STRIP LED 48"	METALUX
+FIELD	-M209	0449(3RBE-24)			REDUCTOR MOTOR 115/1P/15V 180/1RATIO	BOONIE
+FIELD	-MTR207	REFER TO			REFER TO REFERENCE LIST	SCHNEIDER ELECTRIC
+CAB2	-OL207	REFER TO			REFER TO REFERENCE LIST	SCHNEIDER ELECTRIC
+CAB1	-P203	5266-C			Straight Blade Plg. 15 Amp. 125 Volt Industrial Grade -Black & White	HUBBELL
+CAB2	-P203.2	5266-C			Straight Blade Plg. 15 Amp. 125 Volt Industrial Grade -Black & White	HUBBELL
+FIELD	-P0218	GX3-AF-E			PHOTOELECTRIC SENSOR PNP UP TO 10MM	AUTOMATION DIRECT
+CAB1	-PS214	SPD24301			POWER SUPPLY 24VDC300W	CARLOGAVAZZI
+FIELD	-Q207	CUSTOMER			CUSTOMER USE DISCONNECT	SCHNEIDER INDUSTRIAL
+CAB2	-R203	5266-C			REFER TO REFERENCE LIST	CARLOGAVAZZI
+CAB1	-R218	RMAA45240C			RELAY 4PDT 24VDC	SCHNEIDER INDUSTRIAL
+CAB1	-R218	SV4505C			RELAY HOLDER 4 POLE	CARLOGAVAZZI
+CAB1	-SA203	R13-37A			SEALED TOGGLE SWITCH	SCHNEIDER INDUSTRIAL
+FIELD	-SOV210	I2QW2-EUBN-7281			VALVE DM/PH/1/2	GOVEN
+FIELD	-SOV212	35A-AAA-DAA-L1B			SOL VALVE 35A-AAA-DAA-L1B 120V NC	MAC
+FIELD	-SOV221	35A-AAA-DAA-L1B			SOL VALVE 35A-AAA-DAA-L1B 120V NC	MAC
+CAB1	-T209	FF15MC			15 MINUTE TIMER	INTERMATIC
+CAB1	-T211	L9T			Transformeur de controle 50VA avec fusible inclus	SCHNEIDER ELECTRIC
+CAB2	-T212	TMM1			TIME RELAY 1NO INC	LOVATO
+CAB2	-T215	TMM1			TIME RELAY 1NO INC	LOVATO
+CAB2	-T217	TMM1			TIME RELAY 1NO INC	LOVATO
+CAB2	-T219	TMM1			TIME RELAY 1NO INC	LOVATO

ISTblast

**1050 Des Forges Street Hwy, 640 Industrial Park  
Terrebonne, Qc, J6Y 0P6 Canada  
tel 1 877 629-8202 • 450 963 -4400 • Fax 450 963-5122**


UTILISÉES OU AVEC L'ACCORD PRÉALABLE DE  
L'IST SURFACE INC. LA POSSESSION DE CE DESSIN  
N'AUTORISE NI UTILISATION NI LA TRANSMISSION A  
QUICONQUE DES INFORMATION QUI CONTIENT  
HERIN CAN BE USED ONLY WHEN SPECIFICALLY  
AUTHORIZED BY IST SURFACE INC. POSSESSION OF  
THIS DRAWING DOES NOT AUTHORIZE USE NOR  
TRANSMISSION TO ANY OTHER ORGANIZATION

SERIE DCM 50 - 330 3PH POW

Drawing by:  
LAURENT GOL


Page: 4 / 4

## ELECTRICAL SCHEMATIC WITH DCM 600 TO 1800 CARTRIDGE TYPE - 1 PH - DRAWING

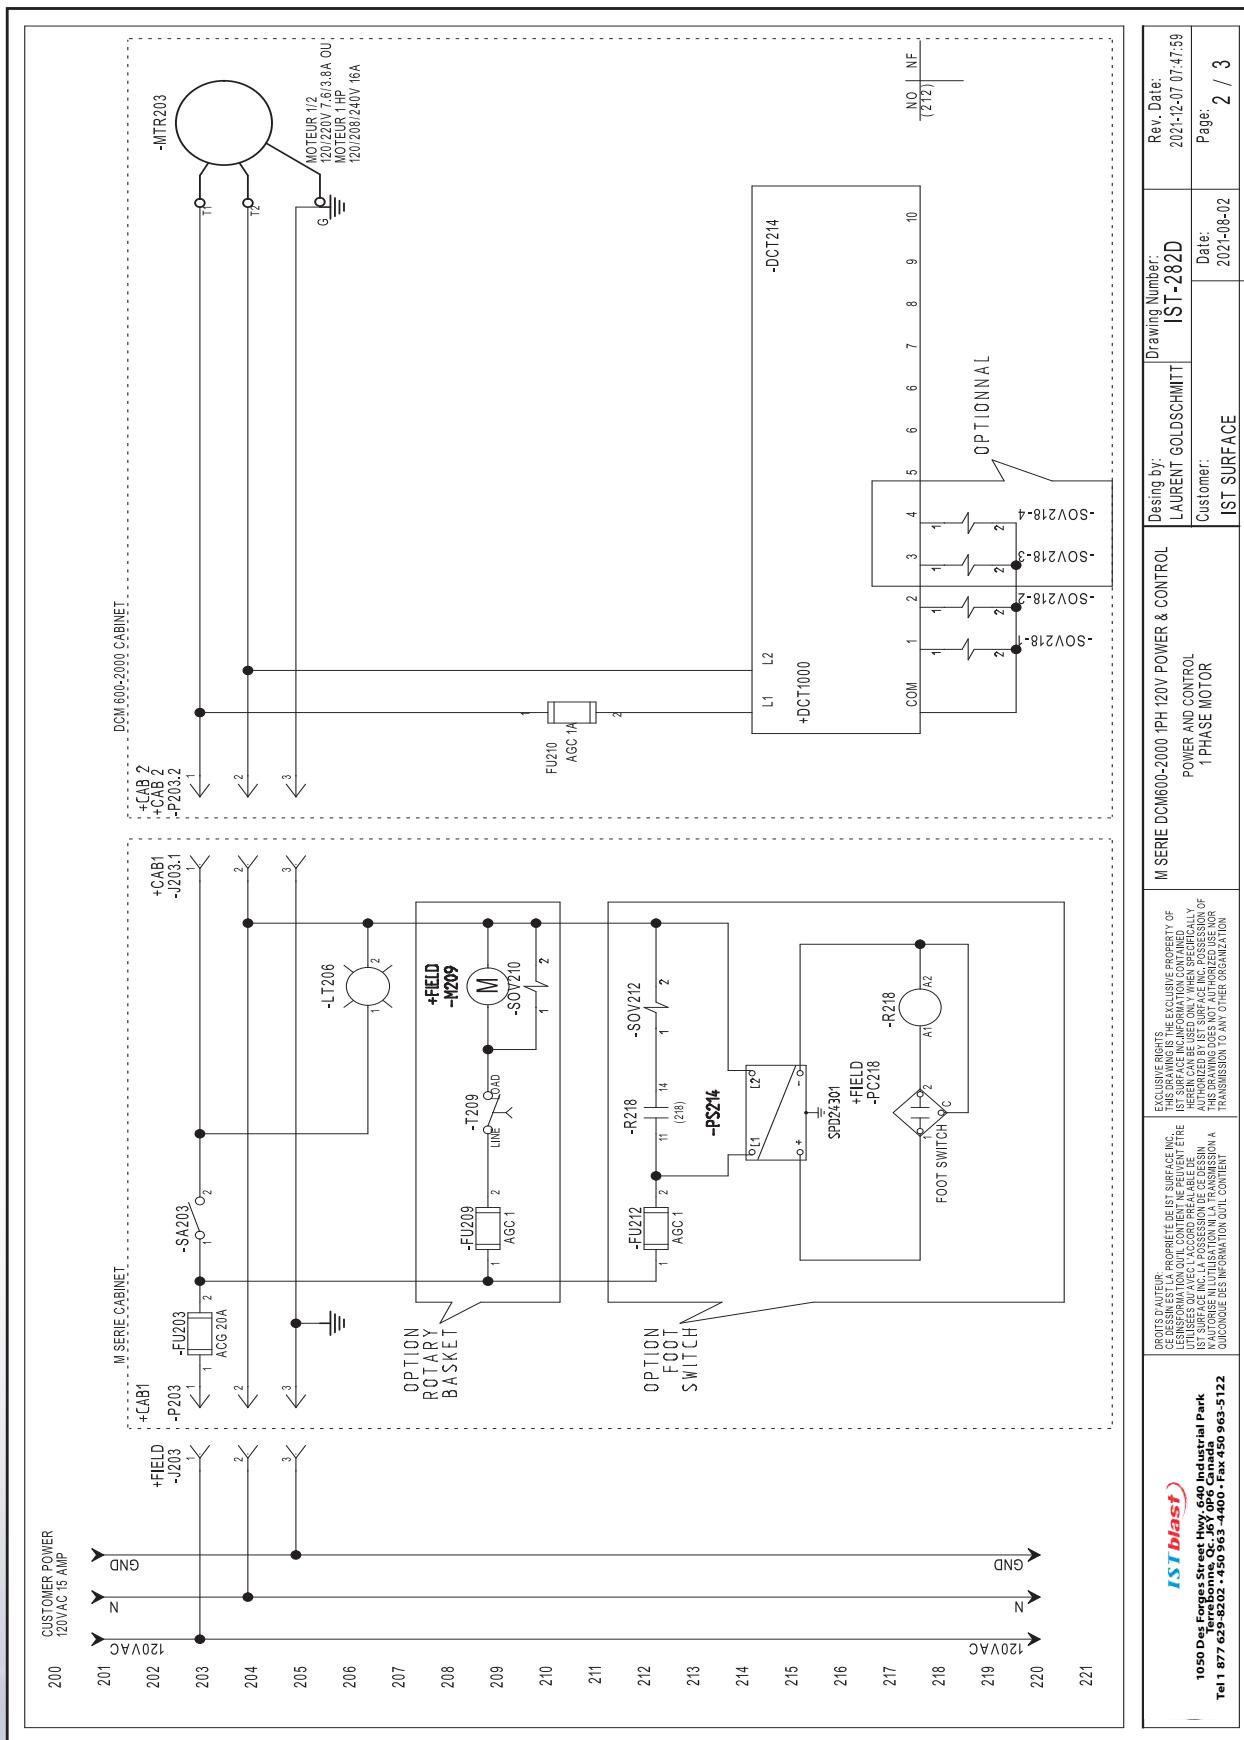

ELECTRICAL SCHEMATIC WITH DCM 600 TO 1800 CARTRIDGE TYPE - 1 PH - PARTS LIST

ELECTRICAL SCHEMATIC WITH 600 TO 1800 CARTRIDGE TYPE - 3 PH - DRAWING

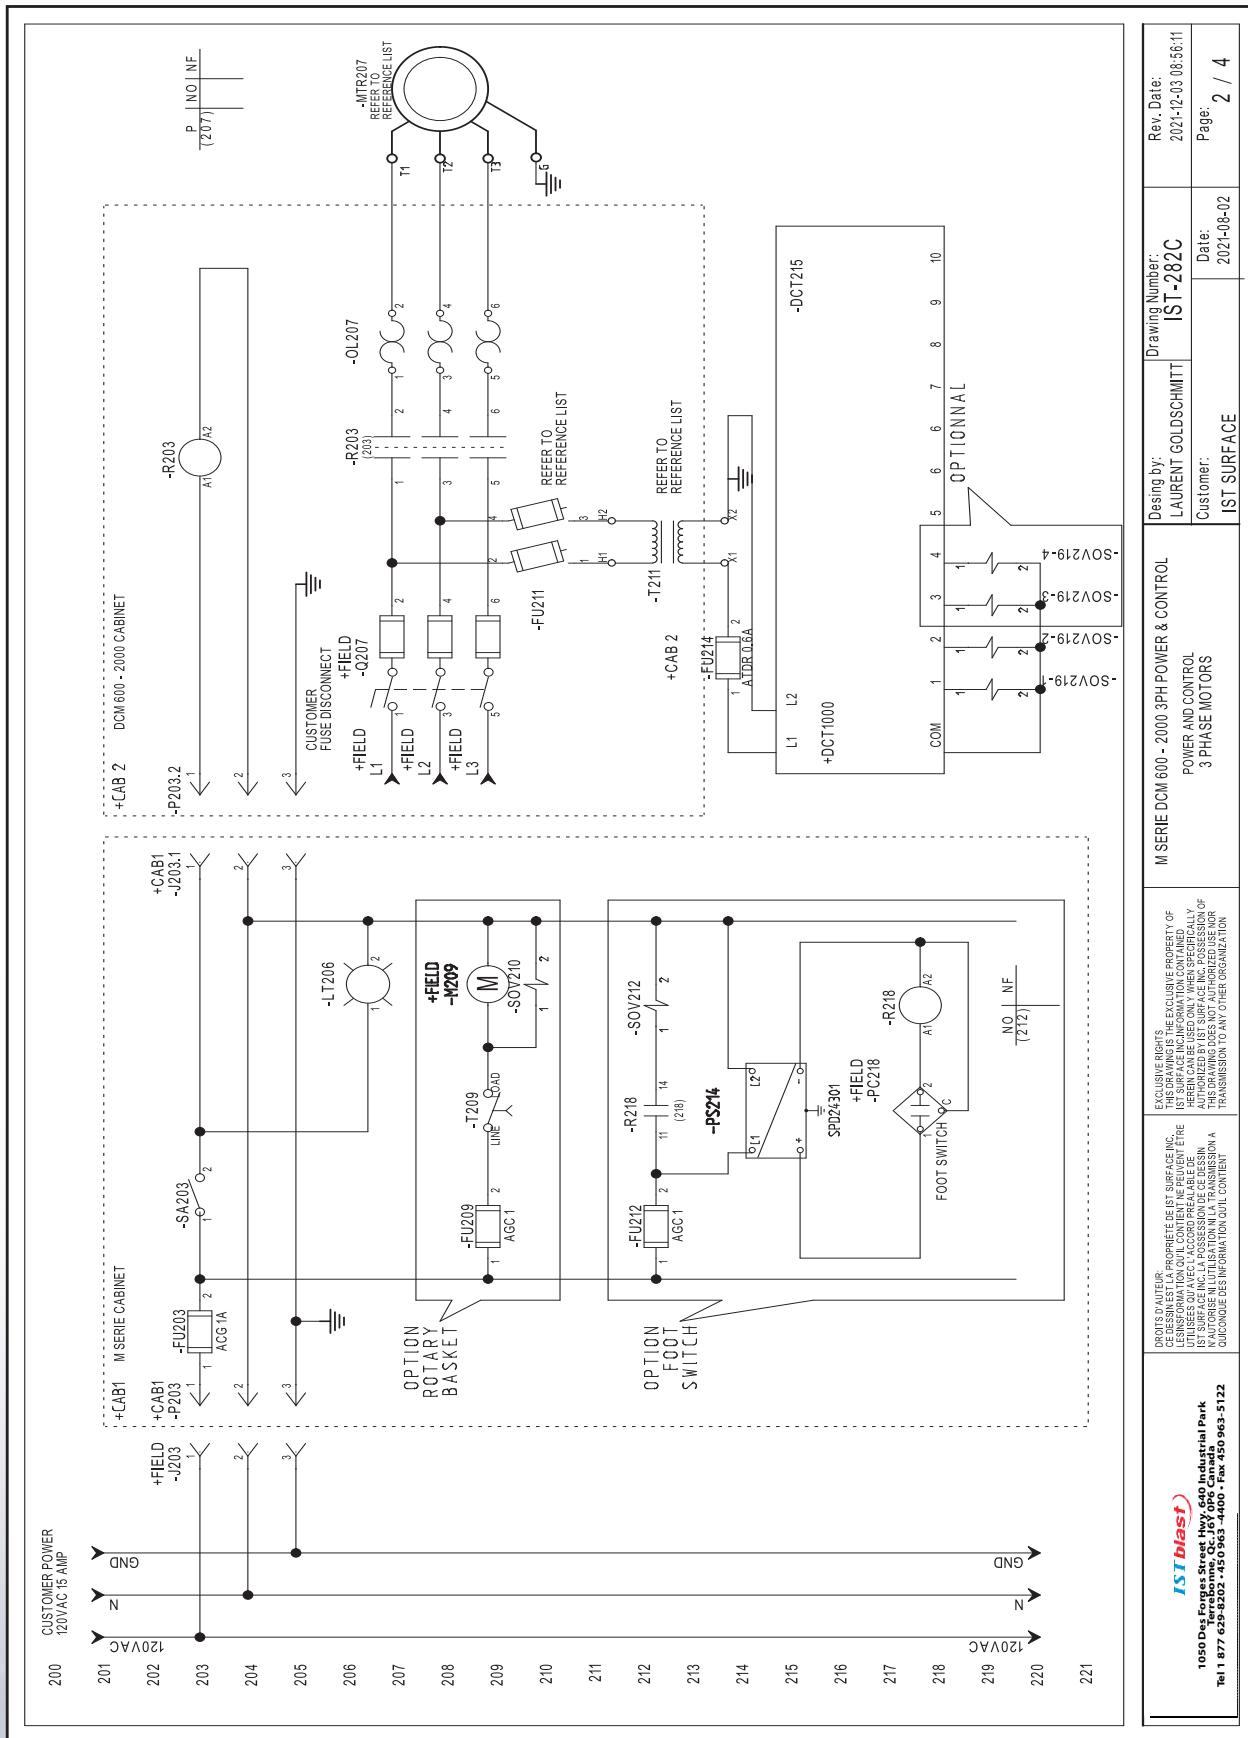

ELECTRICAL SCHEMATIC WITH 600 TO 1800 CARTRIDGE TYPE - 3 PH - PARTS LIST

Fonction	Localisation	Tag	Material (Cat. No.)	Series	Cat. No. Description	Supplier
+DC1000	-DCT215	DTC000			DUST COLLECTOR/TIMER CONTROLLER	DIVYER
+CAB1	-FU203	AC1			GLOSSFACE AMP	FERRAZ
+CAB1	-FU203	HKP-HRR			FUSE HOLDER E-3/FRB-14-6-FL	BUSSMAN
+CAB1	-FU209	AC1			GLOSSFACE AMP	FERRAZ
+CAB1	-FU209	HKP-HRR			FUSE HOLDER E-3/FRB-14-6-FL	BUSSMAN
+CAB2	-FU211	REFER TO			REFER TO REFERENCE LIST	SCHNEIDER ELECTRIC
+CAB1	-FU212	1040			FUSE BLOCK VUSH-4	WEBMULLER
+CAB2	-FU214	ATDR1			FUSE (A 600V TYPE CC TIME DELAY	FERRAZ
+CAB2	-FU214	HKP-HRR			FUSE HOLDER E-3/FRB-14-6-FL	BUSSMAN
+FIELD	-I203	CUSTOMER			CUSTOMER FUSE DISCONNECT	CUSTOMER
+CAB1	-I203.1	5289C			15Amp 25V~ Straight Blade Socket	HUBBELL
+FIELD	-LT206	2SLSPT2040DD20V/4SSTP4040DD20			STRAPLED 24'' STRAP LED 48'' REDUCTOR MOTOR 115V-P115V 180/1RATIO	METALUX
+FIELD	-M209	0449(34RBB-24)			REDUCTOR MOTOR 115V-P115V 180/1RATIO	BOONE
+FIELD	-MTR207	REFER TO			REFER TO REFERENCE LIST	SCHNEIDER ELECTRIC
+CAB2	-OL207	REFER TO			REFER TO REFERENCE LIST	SCHNEIDER ELECTRIC
+CAB1	-P203	5286-C			Straight Blade Plug 15Amp 125 Volt Industrial Grade - Black & White	HUBBELL
+CAB2	-P203.2	5286-C			Straight Blade Plug 15Amp 125 Volt Industrial Grade - Black & White	HUBBELL
+FIELD	-PC218	GX3-AP-IE			PHOTOELECTRIC SENSOR PNP DP TO 10MM	AUTOMATION DIRECT
+CAB1	-P214	SPD24301			POWER SUPPLY 24VDC 300W	CARLOGAVAZZI
+FIELD	-Q207	CUSTOMER			CUSTOMER FUSE DISCONNECT	CUSTOMER
+CAB2	-R203	REFER TO			REFER TO REFERENCE LIST	SCHNEIDER ELECTRIC
+CAB1	-R218	RMA45240C			RELAY 4PDT 24VDC	CARLOGAVAZZI
+CAB1	-R218	SV4805C			RELAY HOLDER 4 POLE	CARLOGAVAZZI
+CAB1	-SA203	R13-371A			SEALED TOGGLE SWITCH	SINCRON INDUSTRIAL
+FIELD	-SOV210	12QW2-EUBN-7281			VALVE BAPH 1/2	GOYEN
+FIELD	-SOV212	35A-AAA-DAAJ-1B			SOLV VALVE 35A-AAA-DAAJ-1B 120V NC	MAC
+FIELD	-SOV219	ROAC25T1200			1MPR Diaphragm Valve-e-18NPT	GOYEN
+FIELD	-SOV219-1	ROAC25T1200			1MPR Diaphragm Valve-e-18NPT	GOYEN
+FIELD	-SOV219-2	ROAC25T1200			1MPR Diaphragm Valve-e-18NPT	GOYEN
+FIELD	-SOV219-3	ROAC25T1200			1MPR Diaphragm Valve-e-18NPT	GOYEN
+FIELD	-SOV219-4	ROAC25T1200			1MPR Diaphragm Valve-e-18NPT	GOYEN
+CAB1	-T209	FF15MIC			15 MINUTE TIMER	INTERMATIC
+CAB2	-T211	L91T			Transformateur de controlle 50VA avec fusible inclus	SCHNEIDER ELECTRIC

## REFERENCE LIST FOR M-SERIE DCM 50 TO 330 & 600 TO 1800

MOTOR RATINGS VOLTS INPUT, STARTER AND OVERLOAD SELECTION							
302	POWER	VOLTS	AMPS	PHASES	HERTZ	RPM	STARTER
2HP	208-230/460V	6-5.4/2.7A	3	60	3450	LEID093A620G70	LRD12/LRD08
2HP	575V	2.16A	3	60	3450	LEID093A620G70	AJT1-AJT7/AJT4
303	208-230/460V	8.1-7.3/3.6A	3	60	3450	LEID093A620G70	AJT3
304	3HP	575V	2.9A	3	60	3450	LEID093A620G70
305	5HP	208-230/460V	13.3-12/6.1A	3	60	3450	LEID093A620G70
306	7.5HP	575V	4.8A	3	60	3450	LCID1687/LCD12G7
307	7.5HP	575V	7.1A	3	60	3450	LCID1687/LCD12G7
308	10HP	460V	8.8A	3	60	3450	LEID093A620G70
309	10HP	575V	12A	3	60	3450	LCID12G7
310	10HP	575V	9.3A	3	60	3450	LCID12G7
311	240VAC	50	1	60	120VAC	SC1A9TFD32X	0.2 amp
312	240VAC	50	1	60	120VAC	SC1A9TFD32I	0.2 amp
313	CONTROL TRANSFORMER SELECTION						
314	PRIMARY VOLTAGE	VA	PHASES	HERTZ	SECONDARY VOLTAGE	PART NO	PRIMARY FUSE
315	600VAC	50	1	60	120VAC	SC1A9TFD32X	0.2 amp
316	480VAC	50	1	60	120VAC	SC1A9TFD32I	0.2 amp
317	240VAC	50	1	60	120VAC	SC1A9TFD32W	0.6 amp
318	MOTOR RATINGS VOLTS INPUT AND SELECTION						
319	POWER	VOLTS	AMPS	PHASES	HERTZ	RPM	PARTS NO
320	2HP	208-230/460V	6-5.4/2.7A	3	60	3450	YSN564/2A-2X4
321	2HP	575V	2.16A	3	60	3450	YSN564/G-5/5
322	3HP	208-230/460V	8.1-7.3/3.6A	3	60	3450	NEP1821/C2-2X4
323	3HP	575V	2.9A	3	60	3450	NEP1821/C2-5/5
324	5HP	208-230/460V	13.3-12/6.1A	3	60	3450	NEP184/TC2-2X4
325	5HP	575V	4.8A	3	60	3450	NEP1821/C2-5/5
326	7.5HP	575V	7.1A	3	60	3450	NEP2131/C2-5/5
327	7.5HP	460V	8.8A	3	60	3450	NEP2131/TC2-2X4
328	10HP	460V	12A	3	60	3450	NEP2151/C2-2X4
329	10HP	575V	9.3A	3	60	3450	NEP2151/C2-5/5
330	EXCLUSIVE RIGHTS CE DÉSSIN EST LA PROPRIÉTÉ EXCLUSIVE DE LA SOCIÉTÉ IST SURFACE INC. IL NE PEUT ÊTRE UTILISÉ NI REPRODUIT SANS LA PERMISSION ÉCRITE DE IST SURFACE INC. LA POSSÉSSION D'UN CE DÉSSIN N'AUCUNE SIGNIFICATION DE LA PROPRIÉTÉ NI DE LA CONSENTEMENT À QUICQUE AUTRE UTILISATION NI A LA COMMUNIQUATION DE SON CONTENU.						
331	<b>ISTblast</b> 1050 Des Forges Street • Gatineau, Québec J1K 6C4 Tel 1 877 622-8202 • 450 963-4400 • Fax 450 963-5122		<b>M-SERIE DCM 600 - 2000 3PH POWER &amp; CONTROL REFERENCE LIST</b>				Rev. Date: 2021-12-03 08:56:11
332	Customer: LAURENT GOLDSCHMITT IST SURFACE		Drawing Number: IS-T-202C Date: 2019-11-06				Page: 3 / 4

## IST LIMITED WARRANTY

IST warrants all equipment led in this manual which is manufactured by IST and bearing its name, to be free from defects in material and workmanship on the date of sale by an authorized IST distributor to the original purchaser for use. Notwithstanding any special, extended or limited warranty published by IST will, for a period of TWENTY FOUR (24) months from the date of sale, repair or replace any part of the equipment determined by IST to be defective. This warranty applies only when the equipment is installed, operated and maintained in accordance with IST's written recommendations.

This warranty does not cover, and IST shall not be liable for general wear and tear, or any malfunction, damage or wear caused by faulty installation, misapplication, abrasion, corrosion, inadequate or improper maintenance, negligence, accident, tampering, or substitution of non-IST component parts. Nor shall IST be liable for malfunction, damage or wear caused by the incompatibility with IST equipment with structures, accessories, equipment or materials not supplied by IST, or the improper design, manufacture, installation, operation or maintenance of structures, accessories, equipment or materials not supplied by IST.

This warranty is conditioned upon the prepaid return of the equipment claimed to be defective to an authorized IST distributor for verification of the claimed defect. If the claimed defect is verified, IST will repair or replace free of charge any defective parts. The equipment will be returned to the original purchaser, transportation prepaid. If the inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which charges may include the costs of parts, labor, and transportation.

**THIS WARRANTY IS EXCLUSIVE, AND IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.**

IST's sole obligation and the buyer's sole remedy for any breach of warranty shall be as set forth above. The buyer agrees that no other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or any other incidental or consequential loss) shall be available. Any action for breach of warranty must be brought forward within one (2) years of the date of sale.

**IST MAKES NO WARRANTY, AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IN CONNECTION WITH ACCESSORIES, EQUIPMENT, MATERIALS OR COMPONENTS SOLD BUT NOT MANUFACTURED BY IST.** These items sold, but not manufactured by IST (such as electric motors, switches, hose, etc.), are subject to the warranty, if any, of their manufacturer. IST will provide the purchaser with reasonable assistance in making any claim for breach of these warranties.

### LIMITATION OF LIABILITY

In no event will IST be liable for indirect, incidental, special or consequential damages resulting from IST supplying equipment hereunder, or the furnishing, performance, or use of any products or other goods sold hereto, whether due to a breach of contract, breach of warranty, the negligence of IST, or otherwise.

**Report all accidents or "near misses" which involve IST products to:**

- Technical Assistance

**The following items are not covered under the IST warranty policy:**

- Parts or chassis replacement due to normal wears.

**Defective material or workmanship is not considered normal wear**

## IST WARRANTY REGISTRATION

IST would like to thank you for your recent purchase of our product line. Please complete the card below and either mail or fax it to our office so that we may start the warranty of your product and keep you up to date on the EPA regulations by fax. Again, thank you for your purchase and if you have any suggestions or comments, please feel free to contact our office.

**COMPANY NAME :** \_\_\_\_\_

**ADDRESS :** \_\_\_\_\_

**CITY :** \_\_\_\_\_ **STATE/PROV. :** \_\_\_\_\_

**COUNTRY :** \_\_\_\_\_ **ZIP CODE :** \_\_\_\_\_

**CONTACT :** \_\_\_\_\_

**TEL. NUMBER:** \_\_\_\_\_ **EMAIL:** \_\_\_\_\_

**FAX NUMBER:** \_\_\_\_\_

**PURCHASE FROM:** \_\_\_\_\_

**DATE OF PURCHASE:** \_\_\_\_\_

Month Day Year

**SERIAL NUMBER:** \_\_\_\_\_ **MODEL NUMBER:** \_\_\_\_\_

**TYPE OF MEDIA USED:** \_\_\_\_\_

**Which factors most influenced your decision to purchase this unit?**

**SUGGESTIONS ABOUT THE EQUIPMENT:** \_\_\_\_\_

Please fill out the form above and send it to us by mail, email or fax so we can register your product and keep you updated on the latest regulations released by the EPA. We thank you for your purchase and remain at your entire disposal for any further query regarding the operation of your equipment.

## International Surface Technologies

1050 Des Forges Street  
Hwy. 640 Industrial Park  
Terrebonne, Quebec  
J6Y 0P6 Canada

Phone : (877) 629-8202  
General Email : [info@istsurface.com](mailto:info@istsurface.com)